



paradise

FLOOR & WINDOWS

FLOORINGS : WOOD | SPORTS
| GRASS | CARPETS | BLINDS

BROWNIE

Single tile images




01



02



04

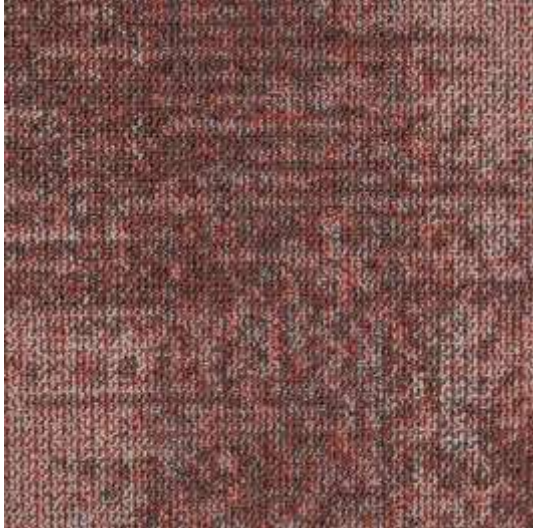

06



07



09



10



Brownie 01


























SPECIFICATION SHEET

Brownie			
Technical Specifications			
Style Name	Brownie		
Construction	Multi Level loop		
Fiber	100 % Duration PP		
Gauge	1/12"		
Stitches	10 Per Inch		
Pile Weight	21 OZ/yd2		
Average Pile Height	4 mm-5.5mm±0.5mm		
Backing	Bitumen		
Tile Size	50cm*50cm		
Traffic Classification	Heavy Commercial		
Anti-Microbial	Health Guard (Available)		
Installation Method			
Performance Specifications			
	Test Code	Standard	Test Results
Flammability Tests			
Radiant Panel	ASTM E 648	Class II	Class II Pass
Methenamine Pill	ASTM D 2859	7 out of 8	8 Pass
Smoke Density	ASTM E 662	Density ≤ 450	≤ 450 Pass
Stability			
Delamination	ASTM D3936	> 3.0 lbc/in	No Specification
Dimensional Stability	AACHEN	≤ 0.2%	≤ 0.2% Pass
Tuft Bind	ASTM D1335	>8.0 lbs	≤ 8.0 lbs
Anti-Static			
Static Propensity	AATCC 134	<3.5 kV	≤ 3.5 KV Pass
Color Fastness			
Light	AATCC 16 E	≤ 4-5	4-5 Pass
Rubbing/Crocking	AATCC 165	≤ 4-5	4-5 Pass
Wear Test			
Castor Chair	BS EN 985	> 2.4	r=2.8 Pass
	AATCC 165	> 2.4	3 Pass
Gebneric Tests			
Green Carpet (VOC)	CRI Green Label	GLP 6331#/6330#	Accredited
Acoustic-Nylon	BS ISO 354	Absorption Coefficient-NRC0.15	
<small>NOTE: All Product Specifications are averages derived from product sample testing and are subject to normal manufacturing tolerances and testing tolerances. Product Specifications may be changed without notice as</small>			



CHARMAINE

SINGLE TILE IMAGES



1



2



4



5





6



7


REFERENCE IMAGES

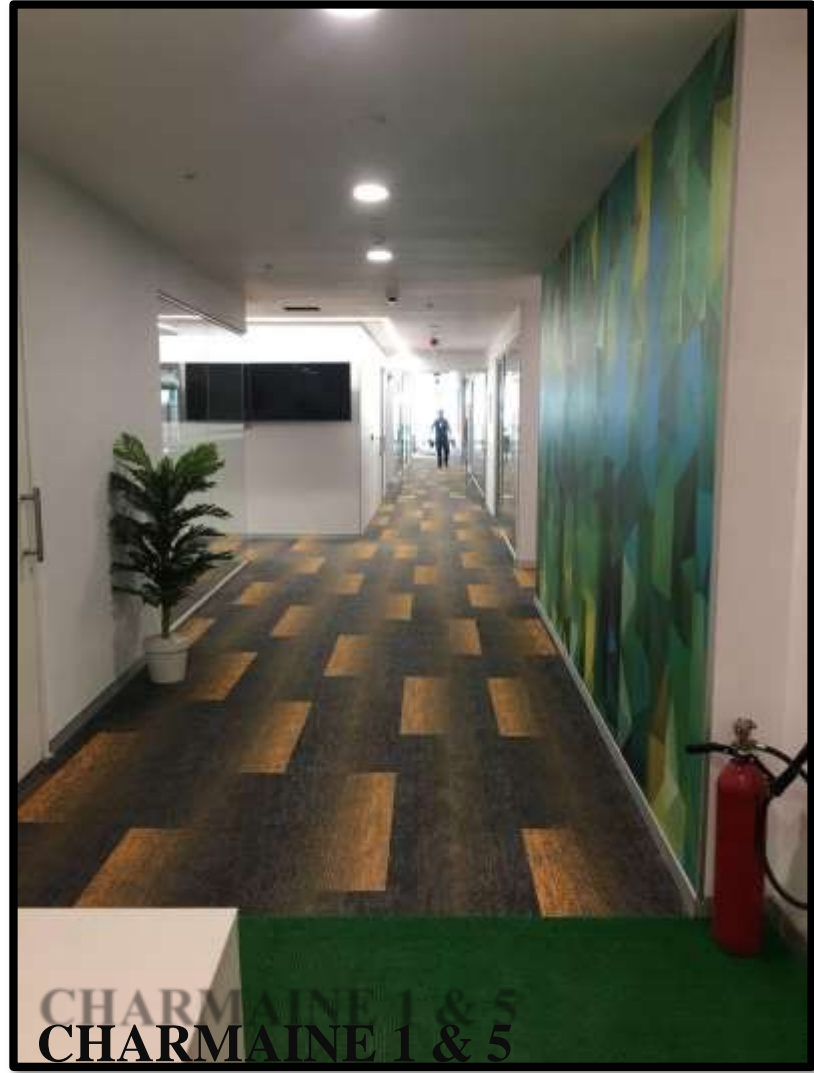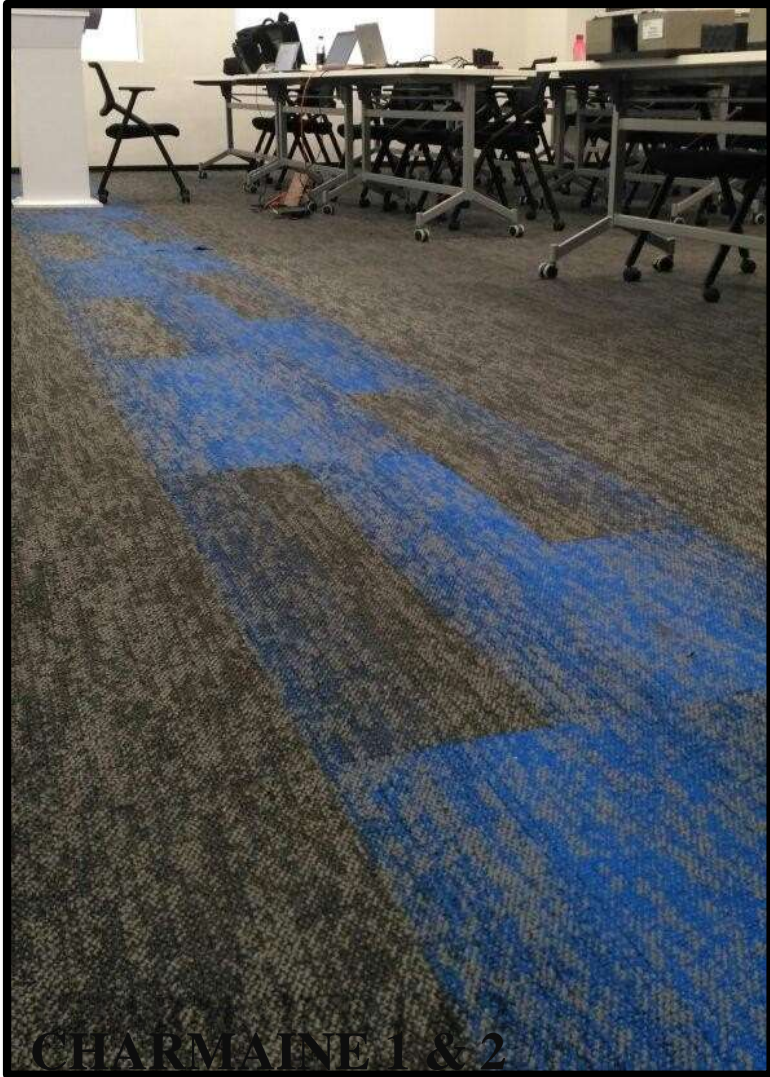








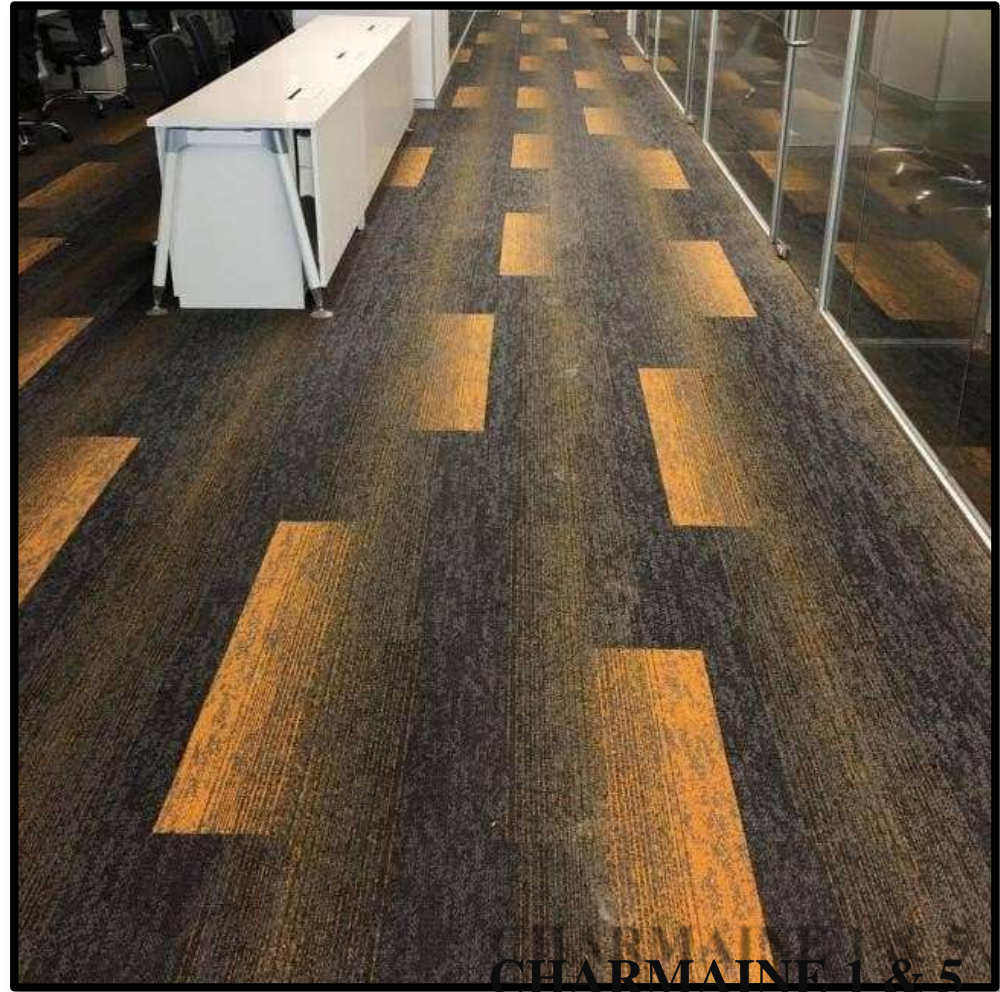

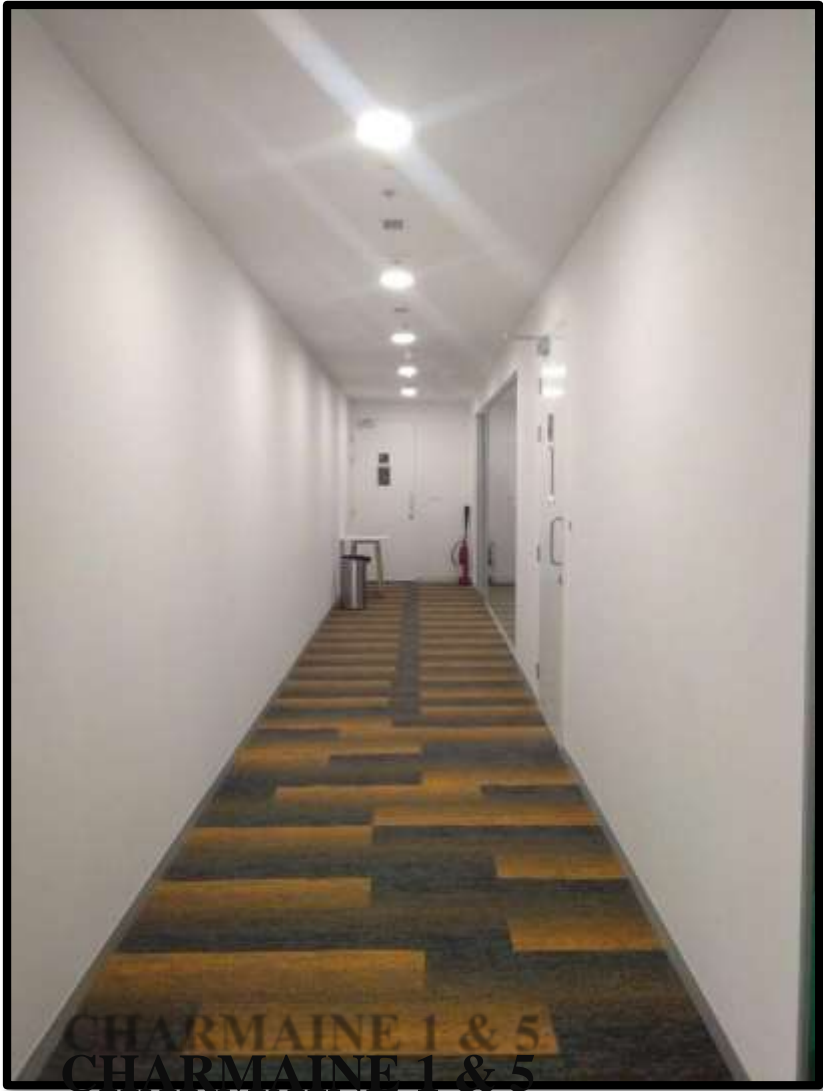




CHARMAINE 1 & 5



CHARMAINE 1 & 5

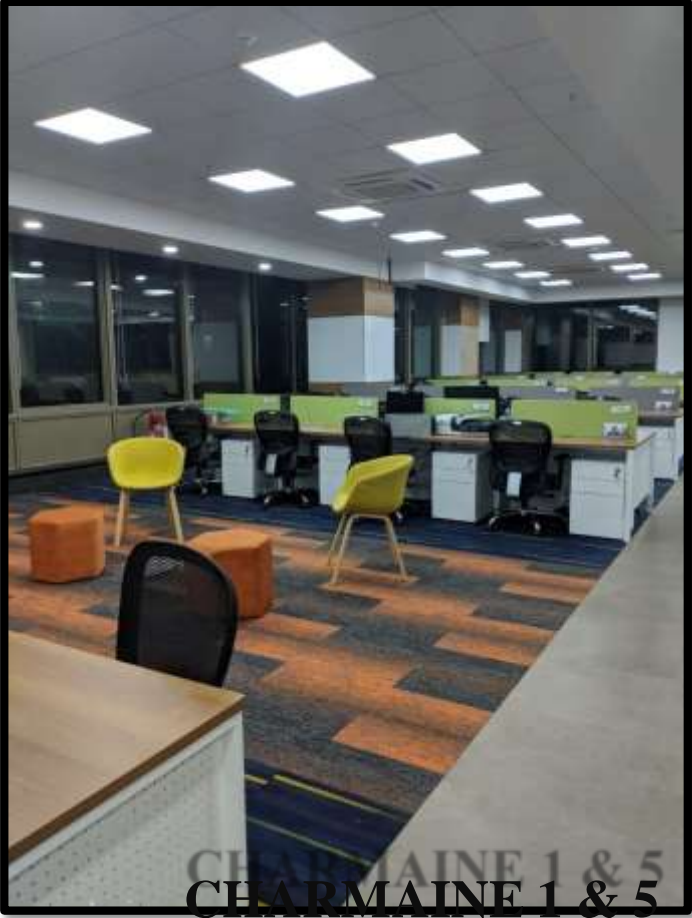


CHARMAINE 1 & 5

CHARMAINE 1 & 4



SPECIFICATION SHEET

CHARMAINE




VOXFLOOR

Technical Specifications

Style Name CHARMAINE
 Construction Multi-Level Loop
 Fiber 100% Duratron PP
 Gauge 1/12"
 Stitches 10 per inch
 Pile Weight 21 OZ/yd²
 Average Pile Height 4 mm/0.5 mm
 Backing PVC with fiberglass
 Tile Size 25cm*100cm
 Traffic Classification Heavy Commercial
 Anti - Microbial Health Guard (Available)



Installation Method



Performance Specifications

Independent Textile
Testms
TESTING SERVICES


	Test Code	Standard	Test Results	
Flammability Tests				
Radiant Panel	ASTM E 648		Class I	Pass
Methenamine Pill	ASTM D2859		8	Pass
Smoke Density	ASTM E 662		≤ 450	Pass
Stability				
Delamination	ASTM D3936	≥ 3.0 lbc/in		
Dimensional Stability	AACHEN	≤ 0.2%	≤ 0.2%	Pass
Tuft Bind	ASTM D1335	≥ 8.0 lbs	≥ 8.0 lbs	
Anti-Static				
Static Propensity	AATCC 134	≤ 3.5 kV	≤ 3.5 kV	Pass
Colour Fastness				
Light	AATCC 16 E	≥ 4-5	4-5	Pass
Rubbing/Crocking	AATCC 165	≥ 4-5	4-5	Pass
Wear Tests				
Castor Chair	B5 EN 985	≥ 2.4	r=2.8	Pass
	AATCC 165	≥ 3-4	3	Pass
Generic Tests				
Green Carpet(VOC)	GLP 6331#/6330#		Accredited	
Acoustic-Nylon	B5 EN ISO 354 Absorption Coefficient - NRC 0.15			



NOTE: All Product Specifications are averages derived from product sample testing and are subject to normal manufacturing normal manufacturing tolerances and testing tolerances. Product Specifications may be changed without notice as long as product performance is not materially affected.

Gravity

Single tile Images

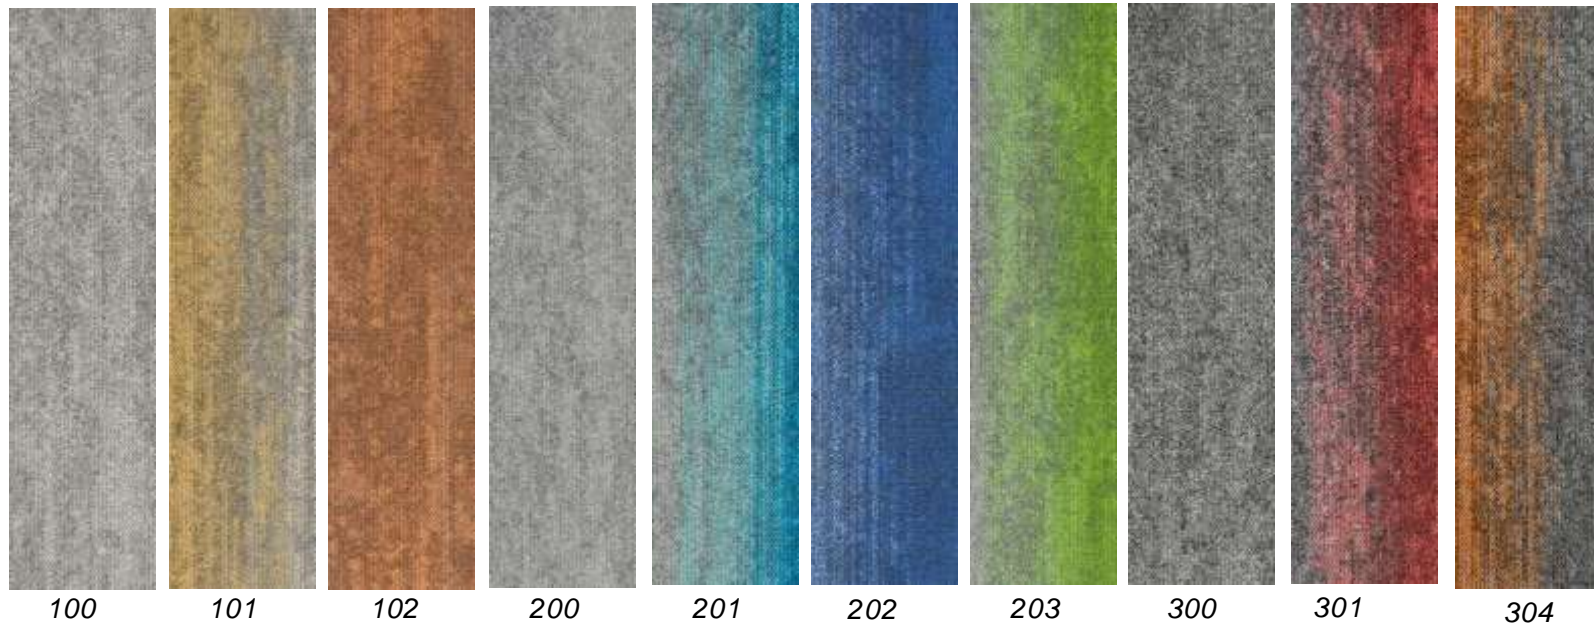

Reference Images



Gravity 100

Reference Images



Gravity 100,101,102

Reference Images



Gravity 100,101





Reference Images



Gravity 100

Reference Images



Gravity 100,101,102

Reference Images



Gravity 301



Gravity 100,101



Reference Images



Gravity 100,101,102



Gravity 301

Reference Images



Gravity 100,101,102

Reference Images



Gravity 100,102



Gravity 100,101

Reference Images



Gravity 300

Reference Images



Gravity 300

Reference Images



Gravity 200,202



Gravity 102



Reference Images



101,202




200,203

Reference Images




Gravity 102,300

Reference Images

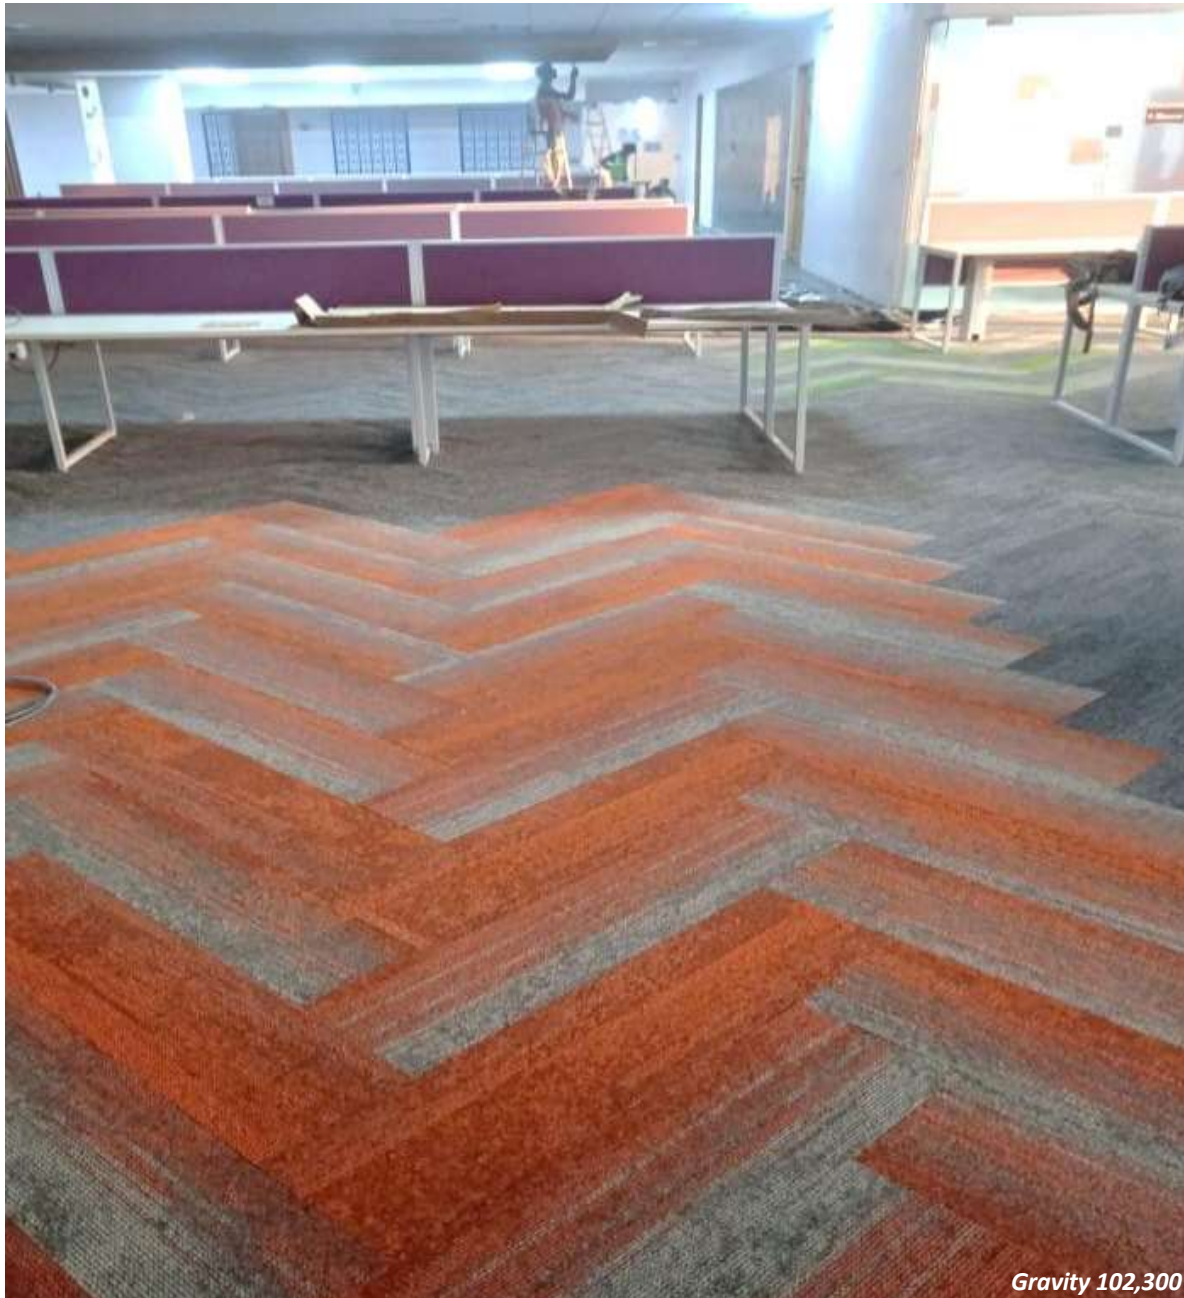

Gravity 102,300

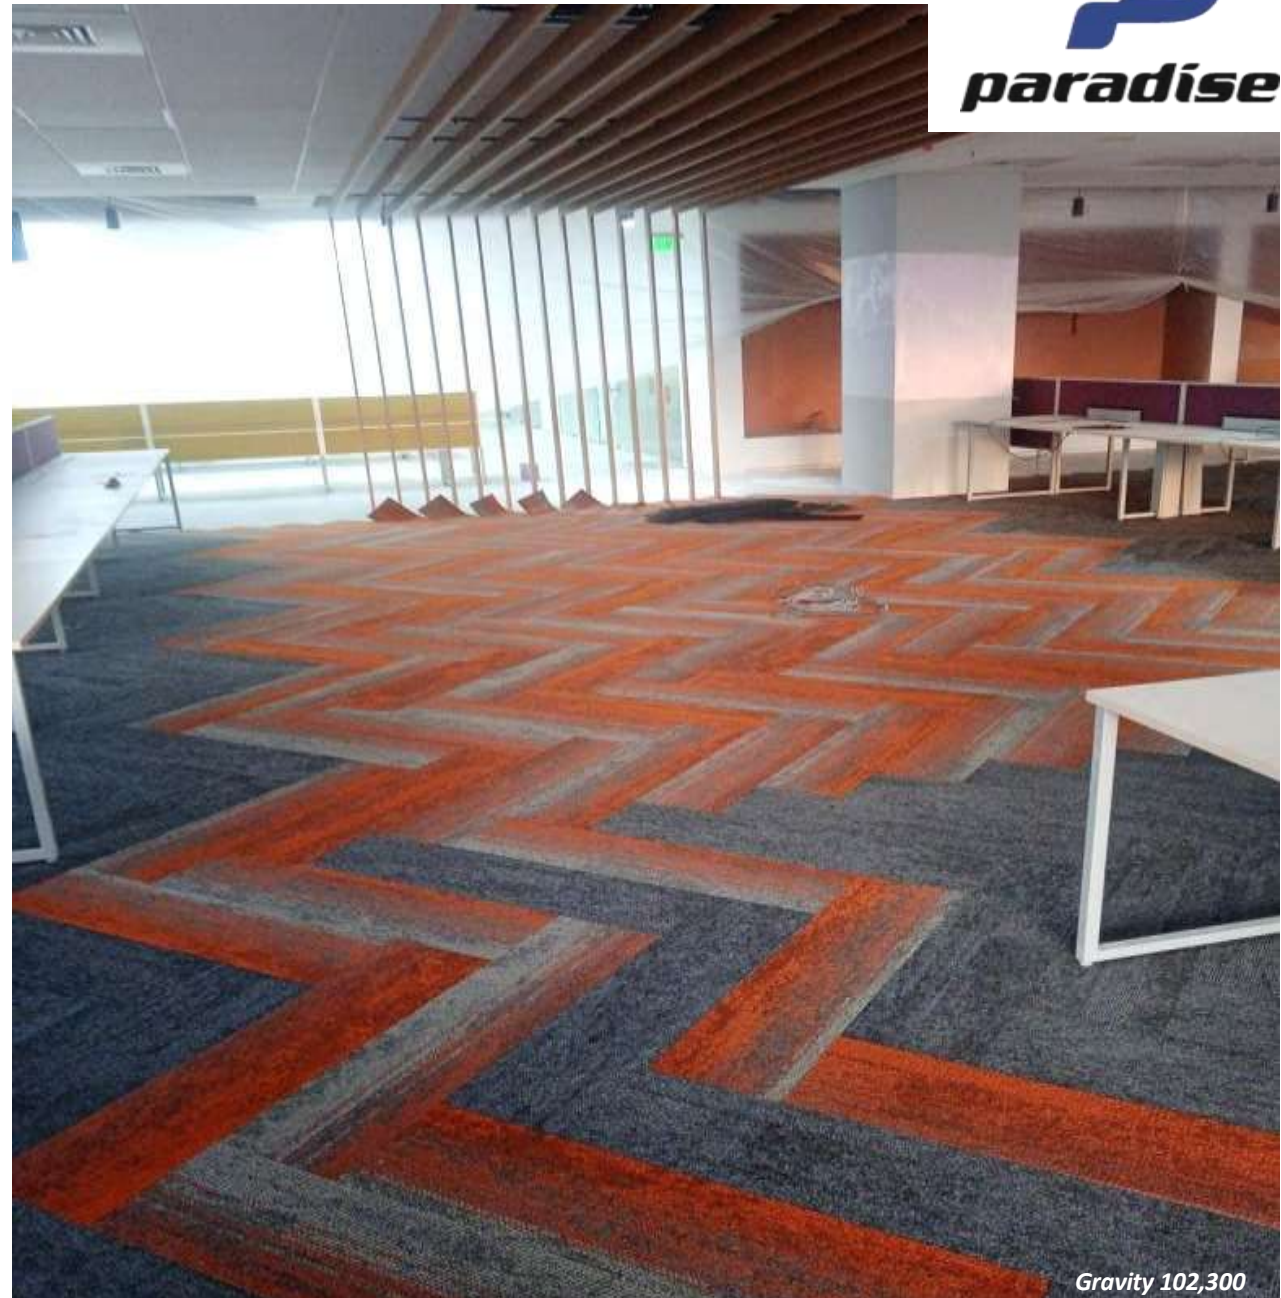

Gravity 102,300

Reference Images



Gravity 102,300

Reference Images



Gravity200,201

Reference Images




Gravity 200,201

Reference Images



Gravity 201,202

Reference Images

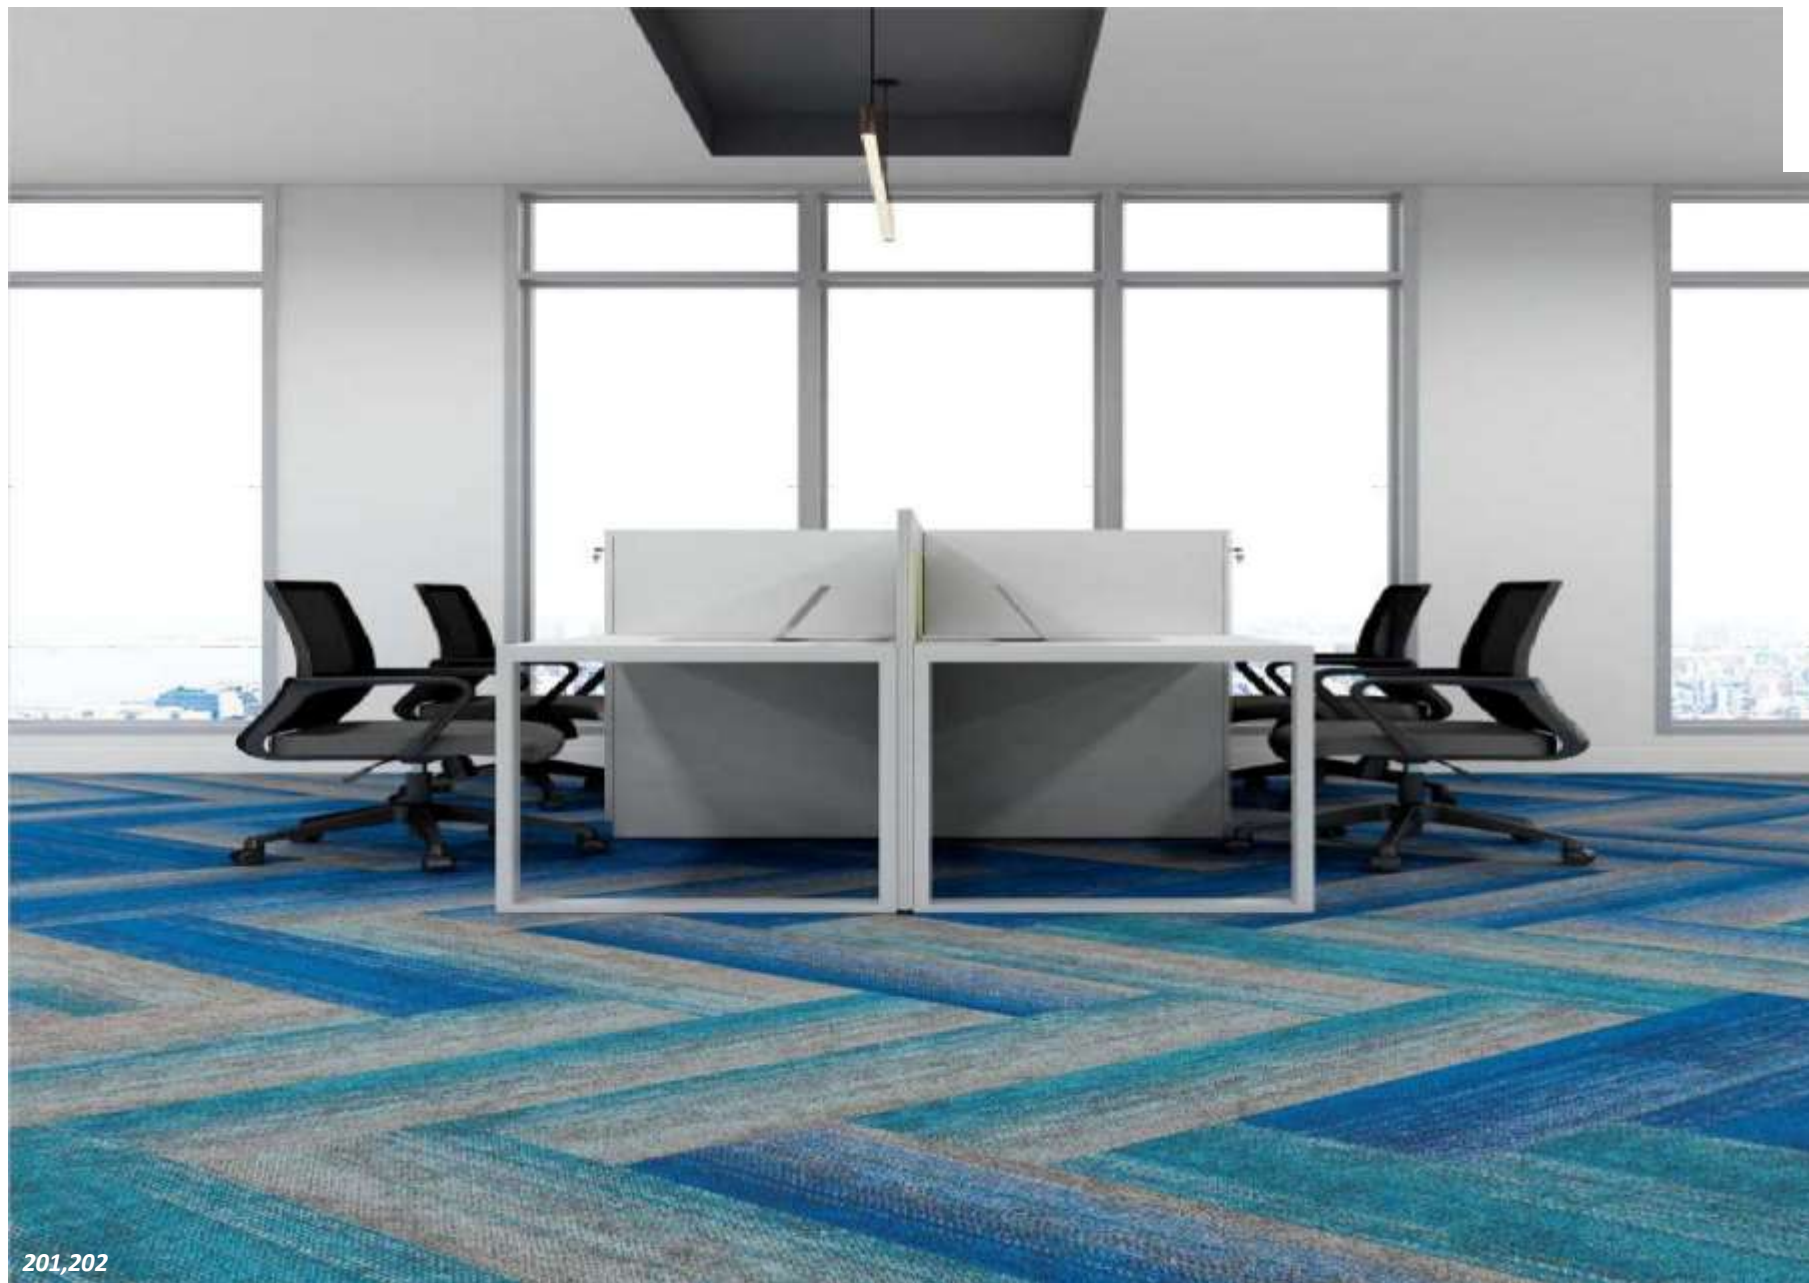


201,202

Reference Images




Reference Images

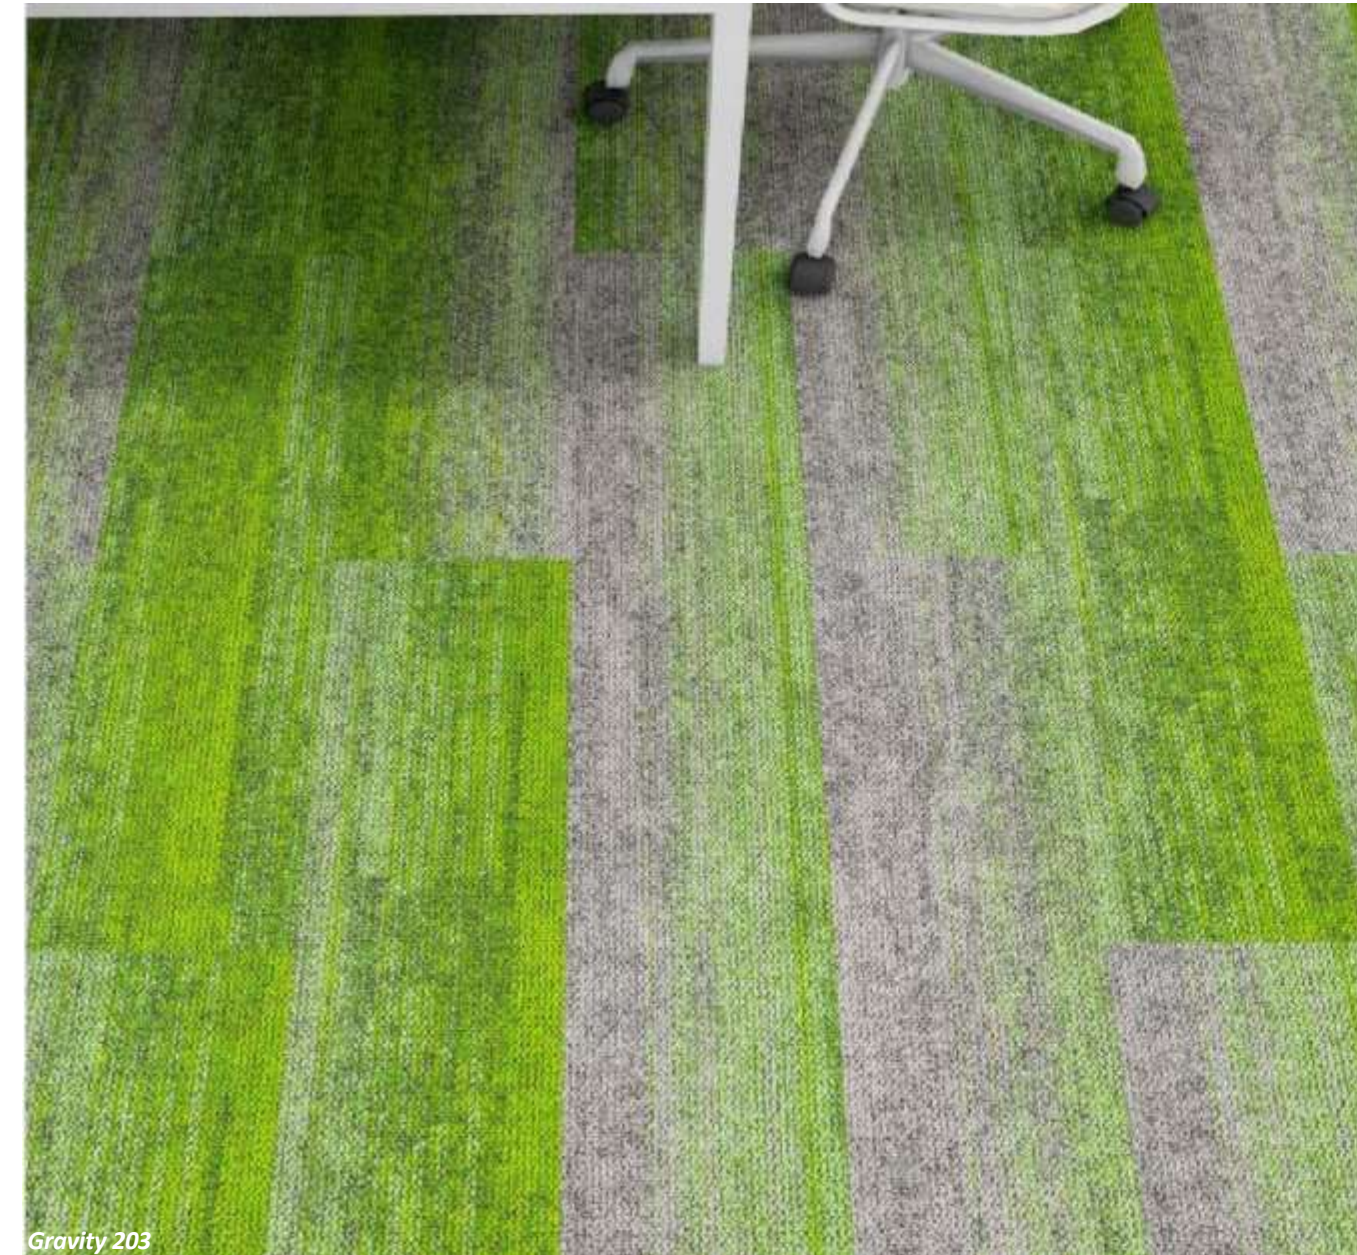

Gravity 203

Gravity 203

Reference Images

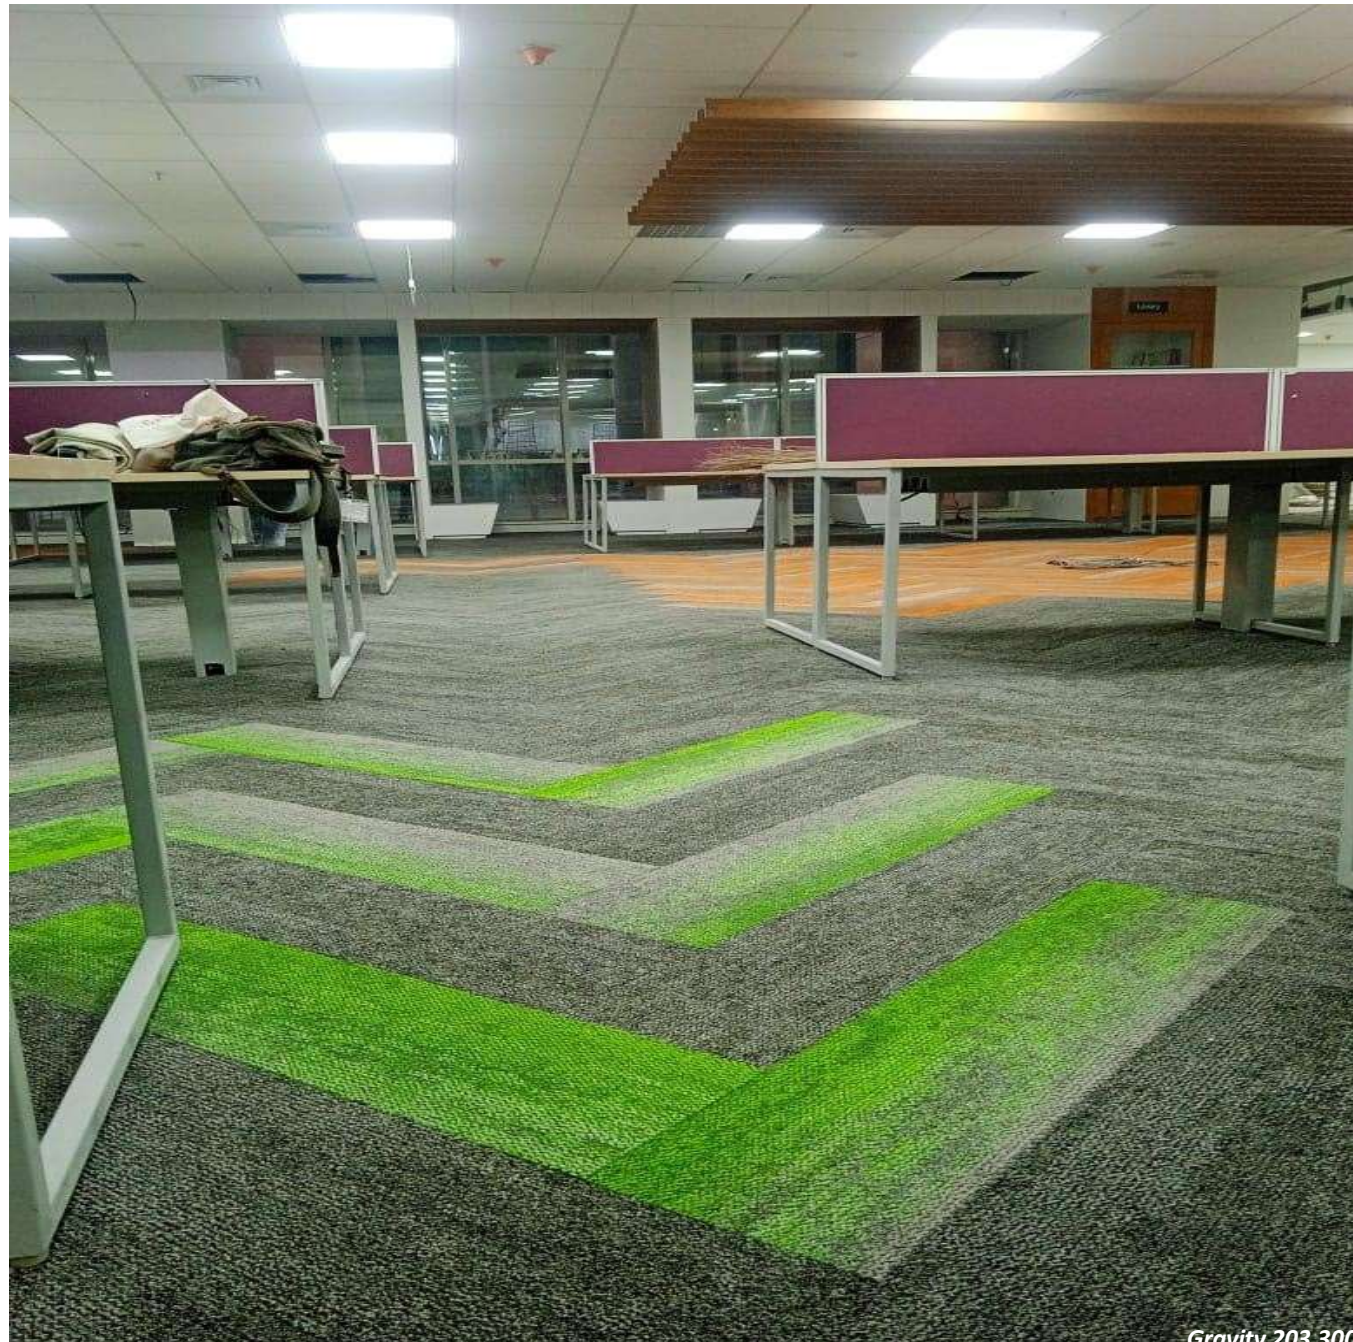

Reference Images












Gravity 300,301



Gravity 300,301

SPECIFICATION SHEET

GRAVITY			
Technical Specifications			
Style Name	GRAVITY		
Construction	Multi Level loop		
Fiber	100 % Duration PP		
Gauge	1/12"		
Stitches	10 Per Inch		
Pile Weight	21 OZ/yd2		
Average Pile Height	4 mm-5.5mm±0.5mm		
Backing	Eco backing		
Tile Size	25cm*100cm		
Traffic Classification	Moderatecommercialuse		
Anti-Microbial	Health Guard (Available)		
Installation Method			
Performance Specifications			
	Test Code	Standard	Test Results
Flammability Tests			
Radiant Panel	ASTM E 648	Class II	Class II Pass
Methenamine Pill	ASTM D 2859	7 OUT OF 8	8 Pass
Smoke Density	ASTM E 662	DENSITY<450	≤ 450 Pass
Stability			
Delamination	ASTM D3936	≤ 3.0 lbc/in	No Specification
Dimensional Stability	AACHN	≤ 0.2%	≤ 0.2% Pass
Tuft Bind	ASTM D1335	≤ 8.0 lbs	≤ 8.0 lbs
Anti-Static			
Static Propensity	AATCC 134	≤ 3.5 KV	≤ 3.5 KV Pass
Color Fastness			
Light	AATCC 16 E	≤ 4-5	4-5 Pass
Rubbing/Crocking	AATCC 165	≤ 4-5	4-5 Pass
Wear Test			
Castor Chair	BS EN 985	> 2.4	r=2.8 Pass
	AATCC 165	> 2.4	3 Pass
Green Carpet (VOC)	CRI Green Label	GLP 100036	Accredited
NOTE: All Product Specifications are averages derived from product sample testing and are subject to normal manufacturing tolerances and testing tolerances. Product Specifications may be changed without notice as long as product performance is not materially affected.			



SKYWALK

SINGLE TILE IMAGES



04



05



45



46



47



57




59

REFERENCE IMAGES






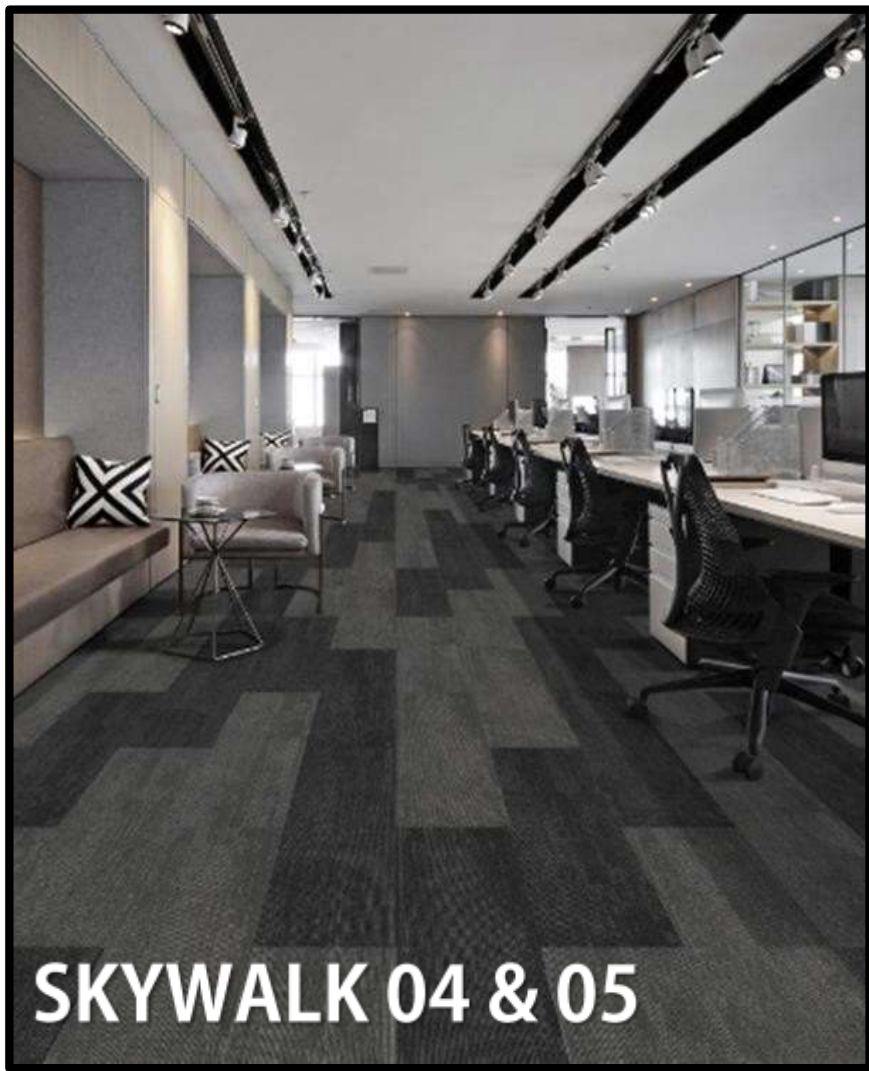





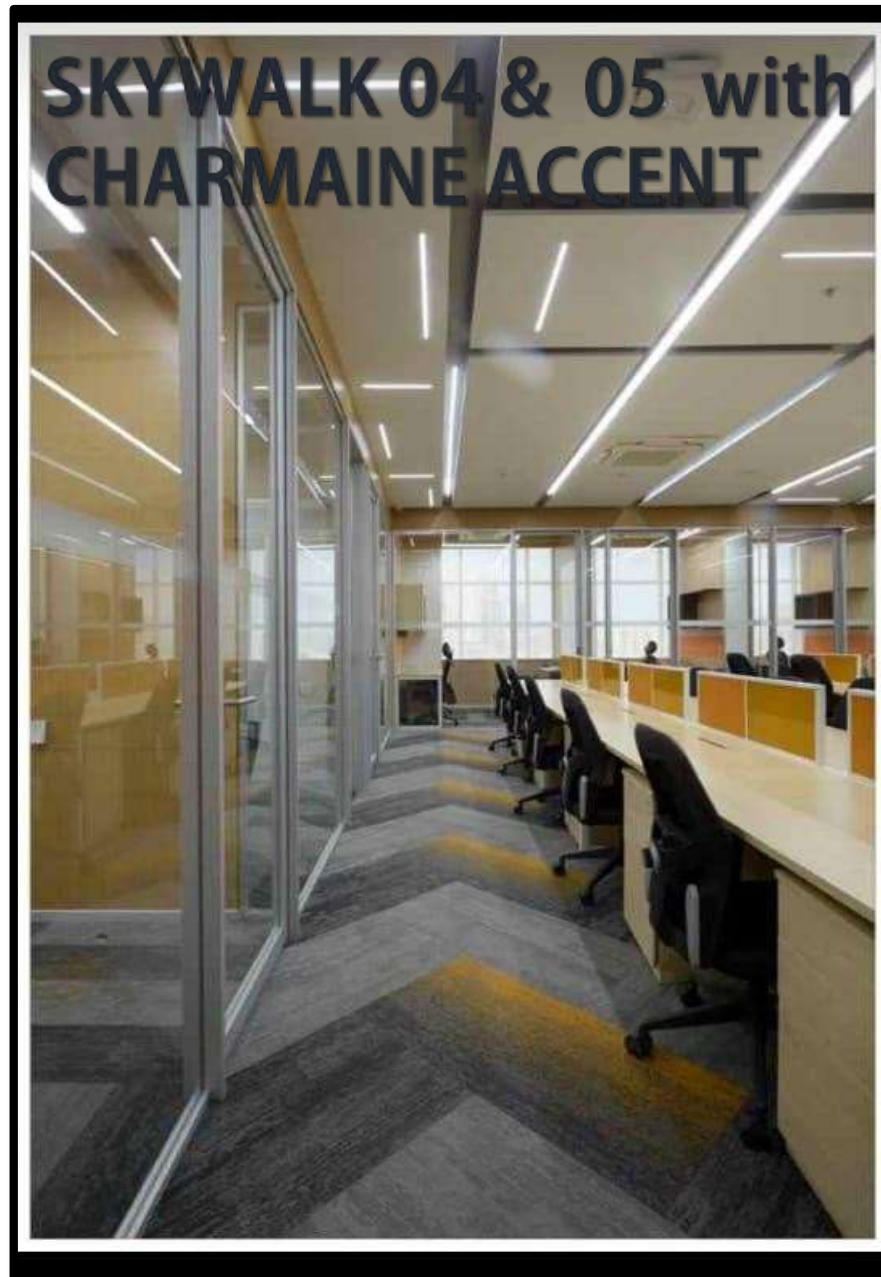




**SKYWALK 04 & 05 with
CHARMAINE ACCENT**



SKYWALK 04 & 45

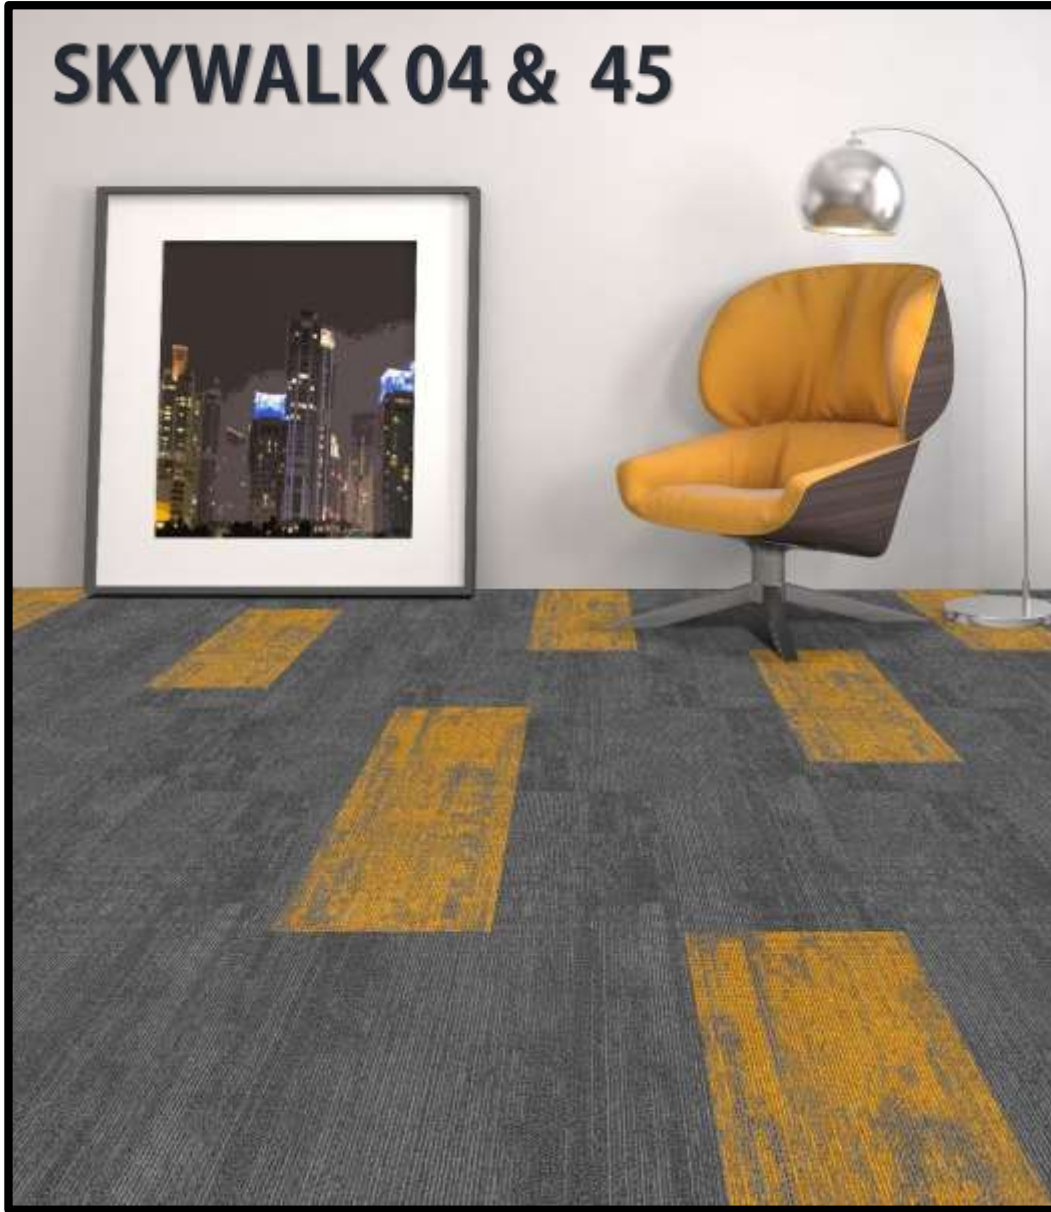





SKYWALK 04 & 46





SPECIFICATION SHEET

Skywalk			
Technical Specifications			
Style Name	Skywalk		
Construction	Multi-Level Loop		
Fiber	100% PP		
Gauge	1/12"		
Stitches	10 per Inch		
Pile Weight	20 OZ/yd ²		
Average Pile Height	4 mm±0.5 mm		
Backing	PVC with fiberglass		
Tile Size	25cm*100cm		
Installation Method			
			
			
			
Performance Specifications			
	Test Code	Standard	Test Results
Flammability Tests			
Radiant Panel	ASTM E 648	Class II	Class II Pass
Methenamine Pill	ASTM D2859	7 out of 8	8 Pass
Smoke Density	ASTM E 662	Density ≤ 450	≤ 450 Pass
Stability			
Delamination	ASTM D3936	≥ 3.0 lbs/in	
Dimensional Stability	AACHEN	≤ 0.2%	≤ 0.2% Pass
Tuft Bind	ASTM D1335	≥ 8.0 lbs	≥ 8.0 lbs
Anti-Static			
Static Propensity	AATOC 134	≤ 3.5 kV	≤ 3.5 kV Pass
Colour Fastness			
Light	AATOC 16 E	≥ 4-5	4-5 Pass
Rubbing/Crooking	AATOC 165	≥ 4-5	4-5 Pass
Generic Tests			
Green Carpet(VOC)	GLP 6331*6330*		Accredited

NOTE: All Product Specifications are averages derived from product sample testing and are subject to normal manufacturing tolerances and testing tolerances. Product Specifications may be changed without notice as long as product performance is not materially affected.




BLOSSOM



paradise




Blossom 01

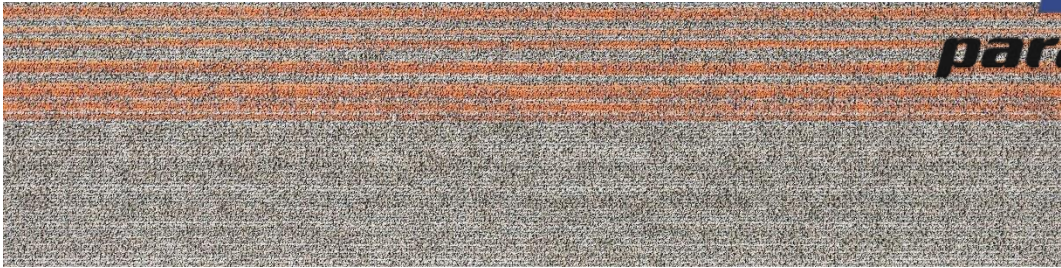

Blossom 01 A




Blossom 02

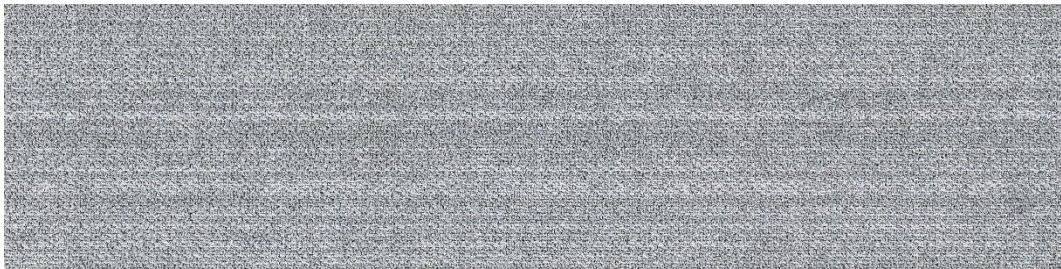

Blossom 03



Blossom 03 A

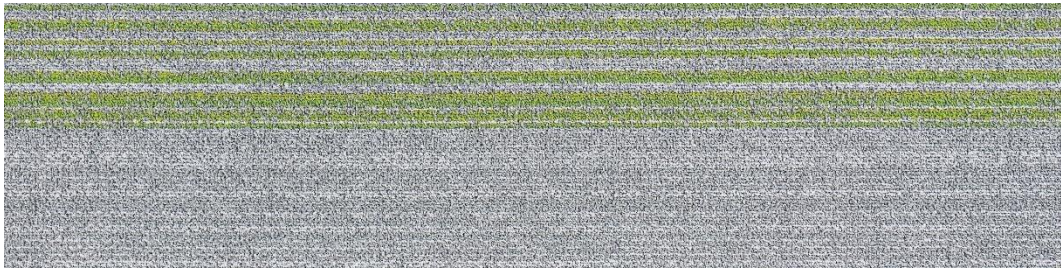

Blossom 04



Blossom 05



Blossom 06



Blossom 07



Blossom 08





Blossom-1+2





paradise



Blossom-3+4









Blossom-5+6







paradise



Blossom-7+8

BLOSSOM

Technical Specifications

Style Name	Blossom
Construction	Multi-Level loop
Fiber	Universal Nylon 6
Color System	100% Solution Dyed
Gauge	1/12"
Stitches	10 Per Inch
Pile Weight	17 OZ/yd ²
Average Pile Height	2.8mm-5.4mm (+0.5mm)
Backing	Eco Bac
Area of Use	Heavy Commercial
Tile Size	25cm*100cm
Traffic Classification	Class III Heavy Commercial
Anti-Microbial	Health Guard (Available)
Installation Method	



Independent Textile
Testins
Service, Inc.



ASHLAR HERRINGBONE

Performance Specifications

	Test Code	Standard	Test Results
Flammability Tests			
Radiant Panel	ASTM E 648-10 Passes (GB 8624-2012)	Class I	GB8624-2012-B Pass
Smoke Density	ASTM E 662	Less than 450	GB/T 8627-1999
Static Propensity	AATCC 134	≤ 3.5 KV	GB/T 18044-2008
Static Control	Life of the carpet Static Protection		
Formaldehyde Purification	JC/T1074-2008	Class I	



HUSSAR PLANKS

Single tile images





Reference images



HUSSAR PLANKS 01,06,07

Reference images



Reference images



Reference images



HUSSAR PLANKS 22



HUSSAR PLANKS 22

Reference images




HUSSAR PLANKS 06,07,36



HUSSAR PLANKS 01,06,07,33



Reference images

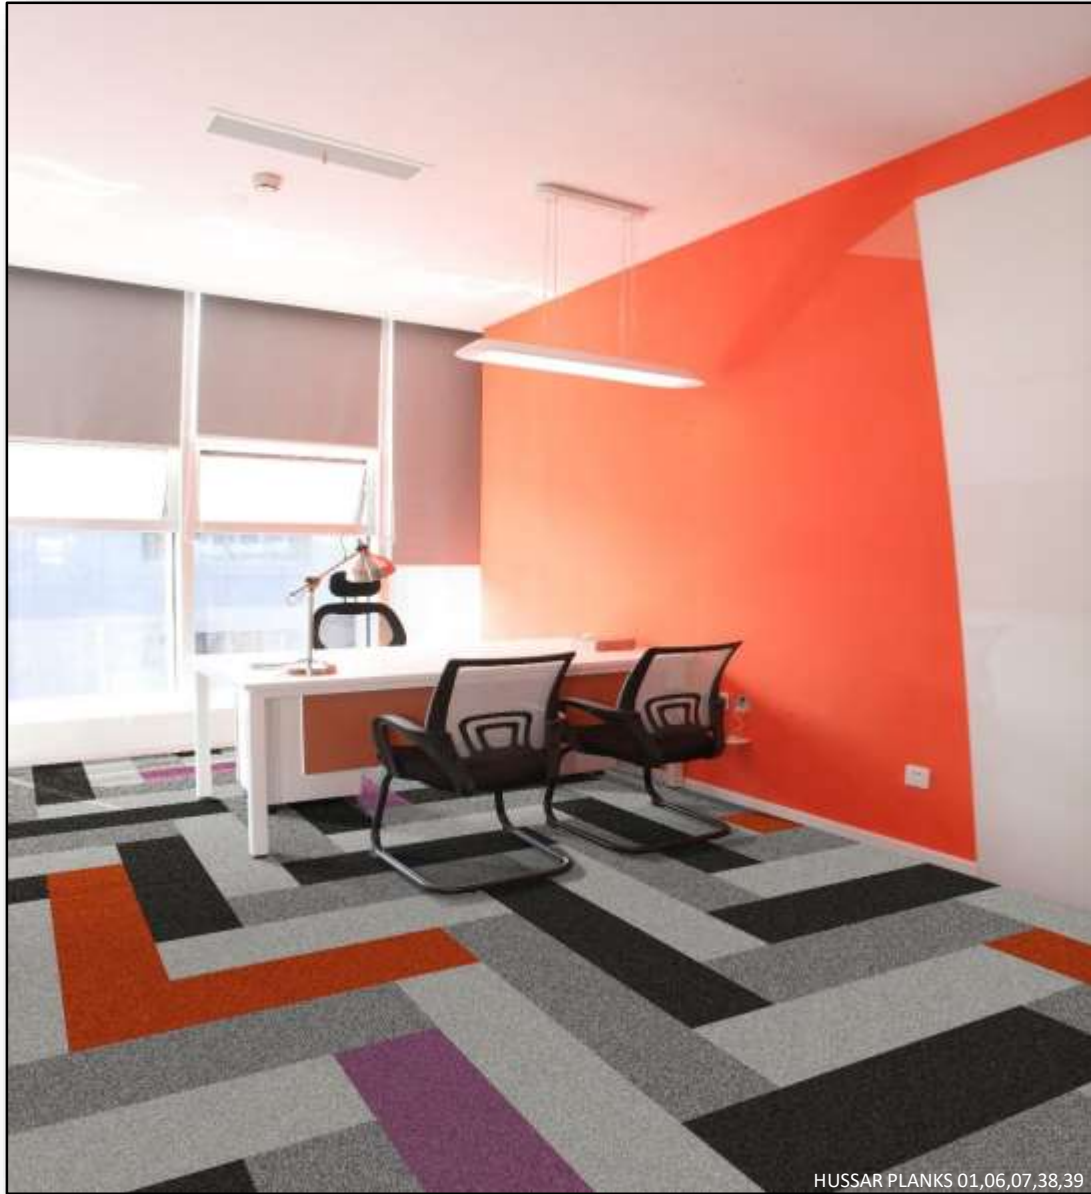

Reference images



Reference images



Reference images



Reference images



HUSSAR PLANKS 01,06,07,39

Reference images



Reference images



HUSSAR PLANKS 01,06,33,34

Reference images



HUSSAR PLANKS 01,06,33,34

Reference images



HUSSAR PLANKS 01,06,07,33

Reference images





Reference images



HUSSAR PLANKS 01,06,36

Reference images

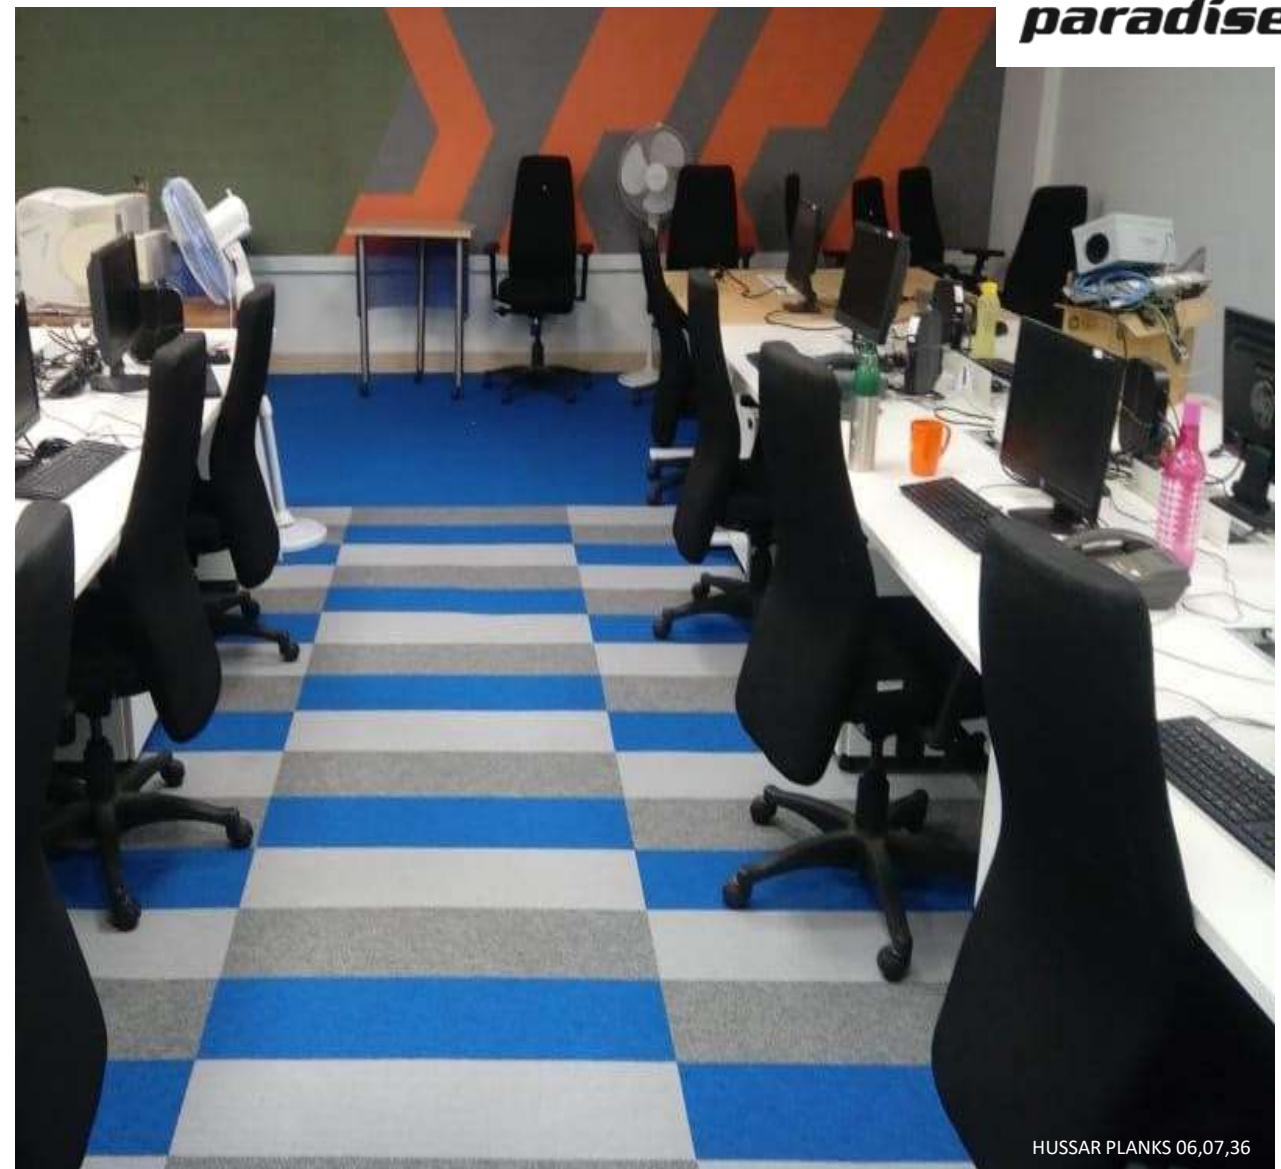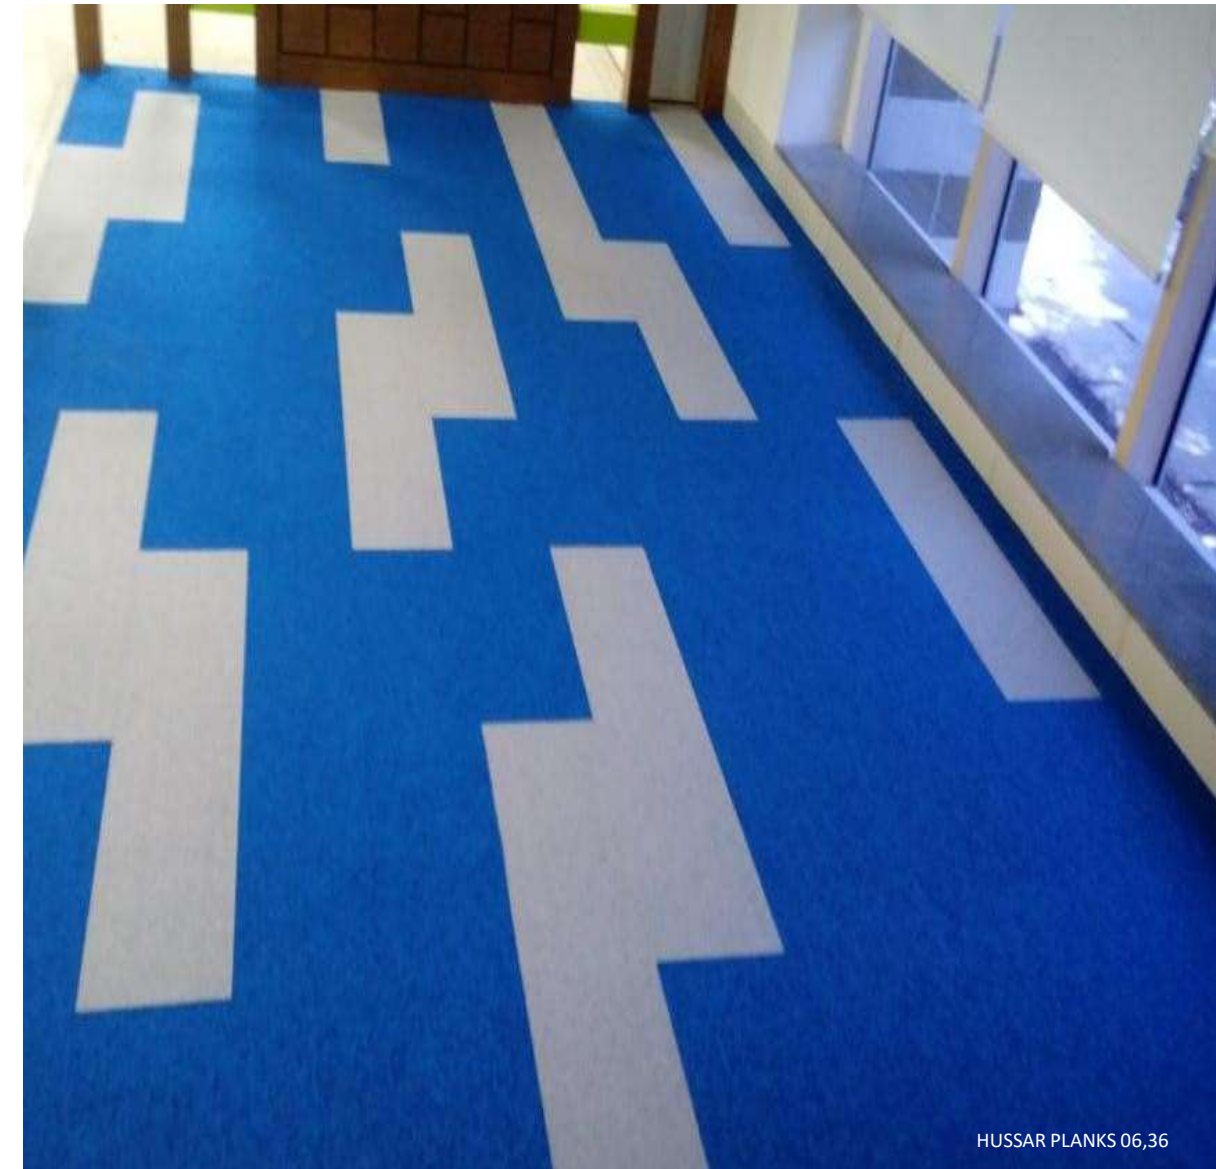

Reference images



SNAPSHOT:-

100% Nylon Carpet, Multi-Level Loop With 18 02 Carpet Tiles In Size: **25cmx100cm** Suitable For Heavy Commercial Use.



SNAPSHOT 01



SNAPSHOT 05



SNAPSHOT 06




SNAPSHOT 02



SNAPSHOT 08



SNAPSHOT 04

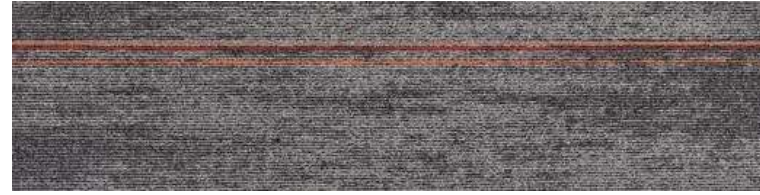


SNAPSHOT 11




SNAPSHOT 12




ASHLAR PATTERN

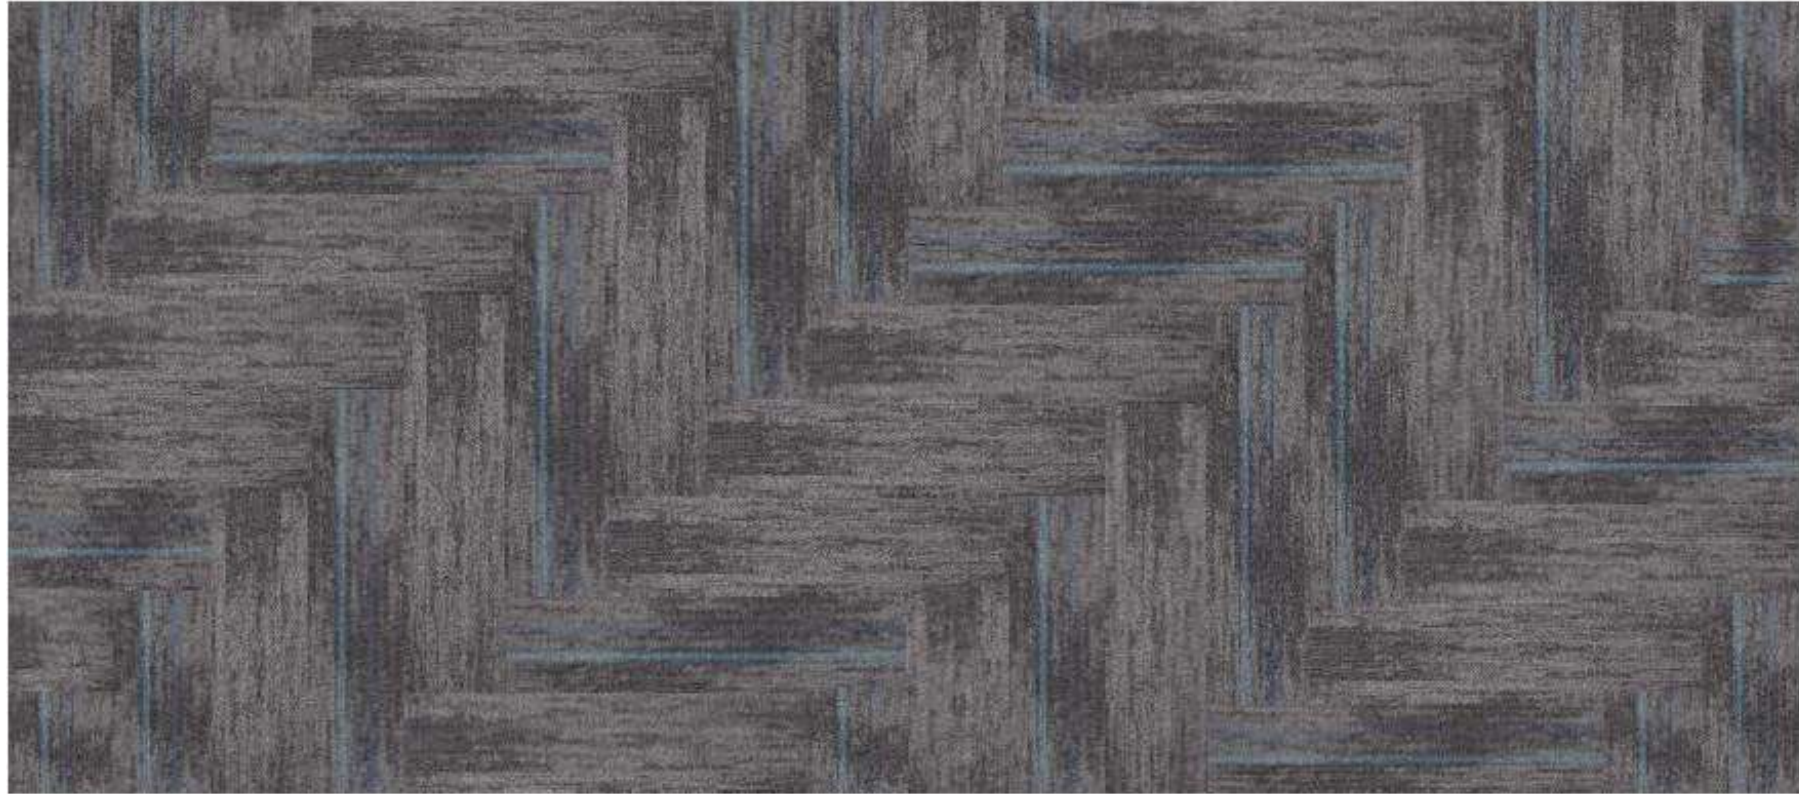

HERRINGBONE PATTERN

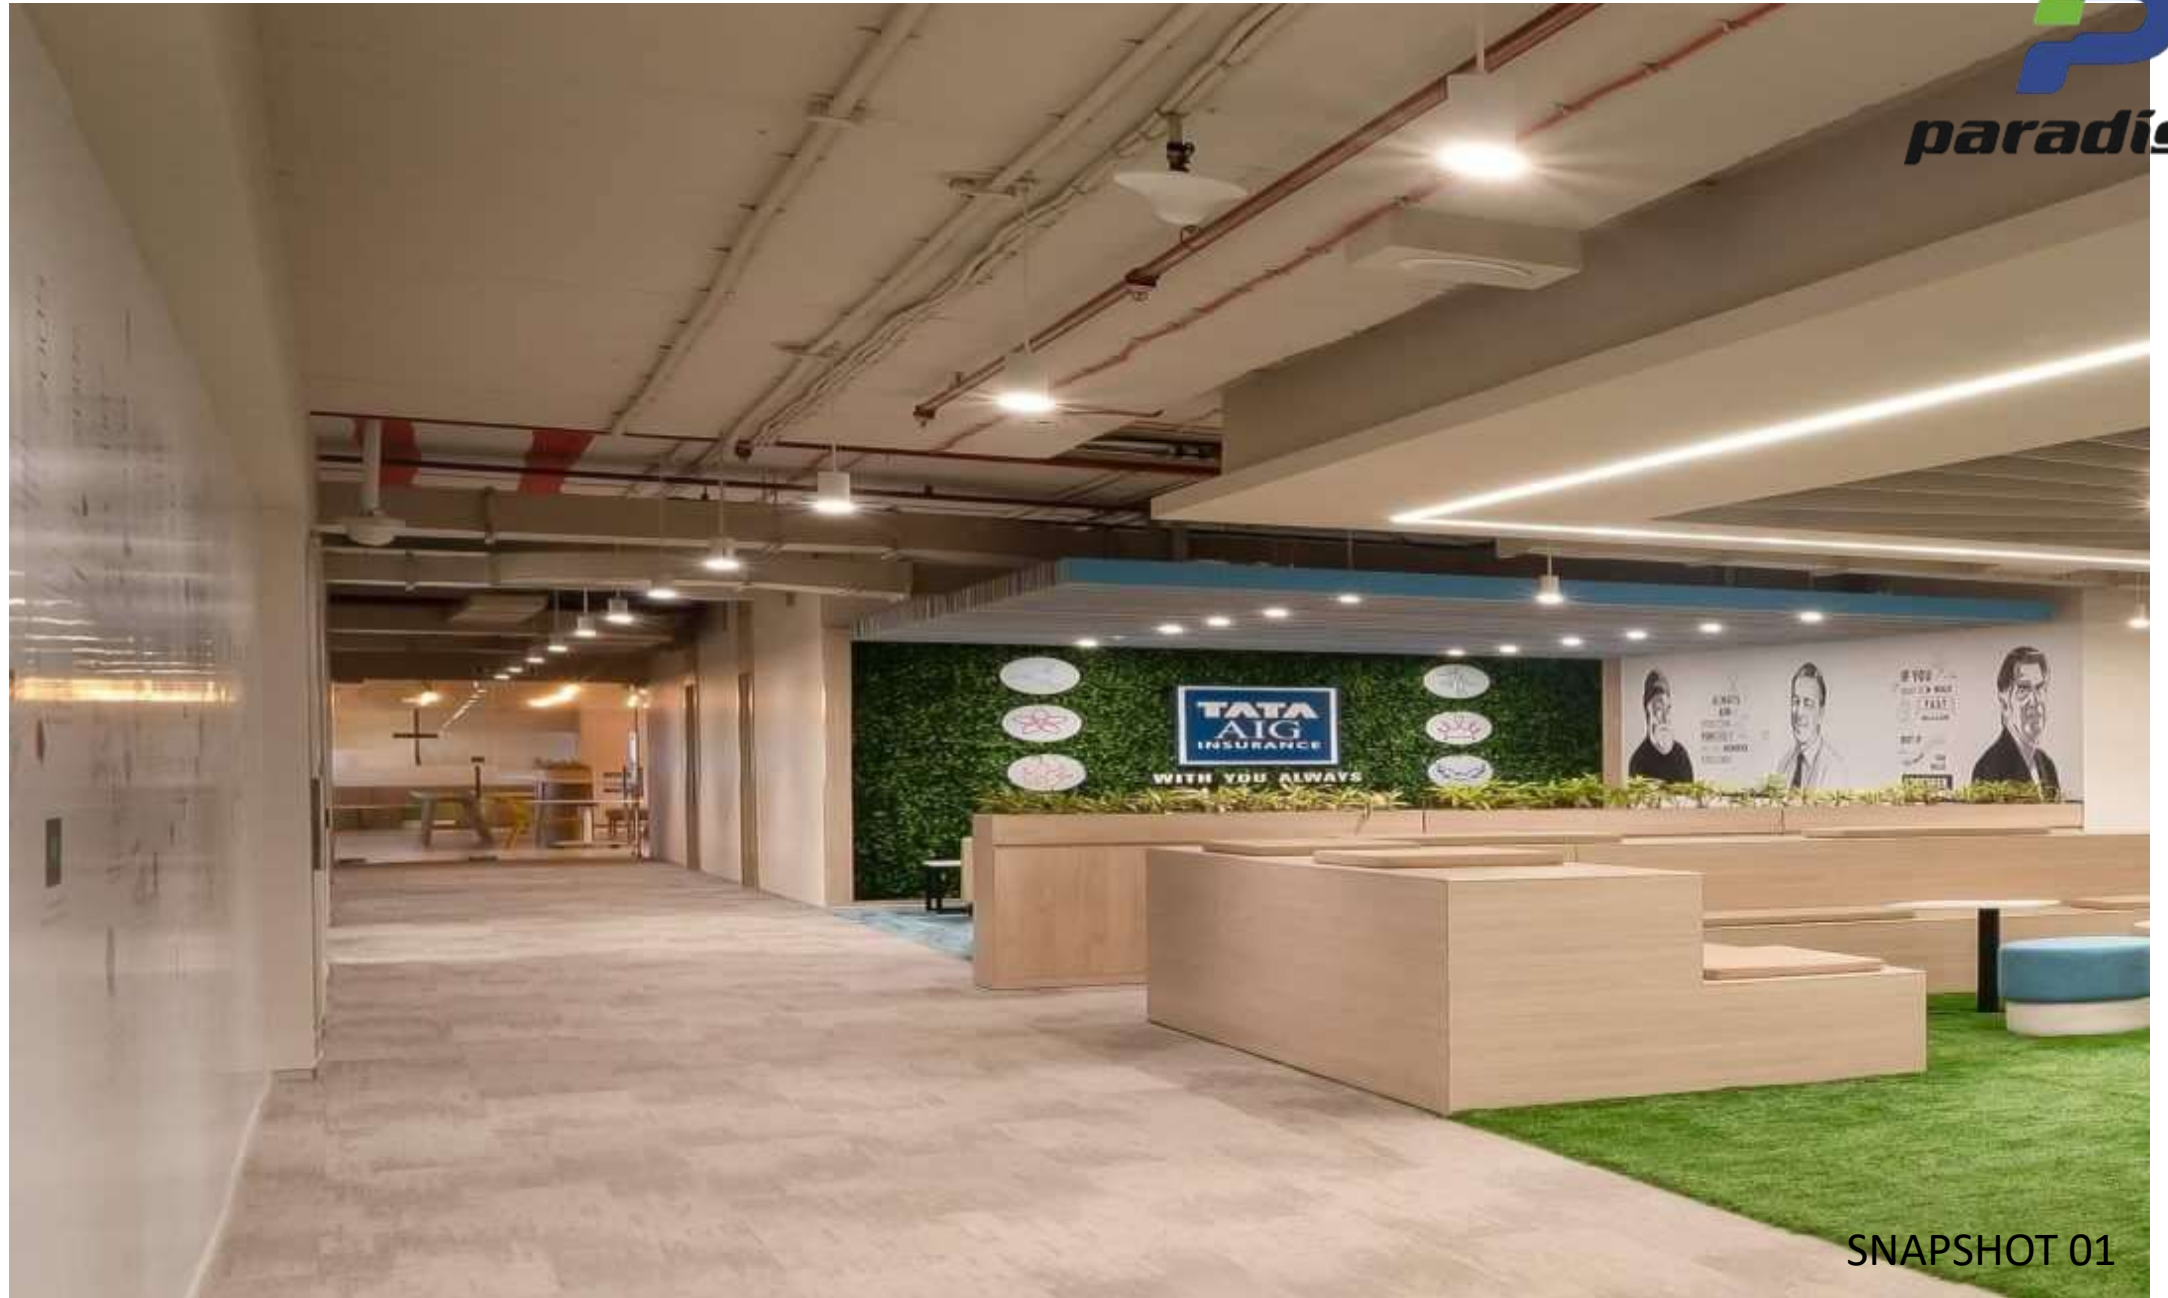

SNAPSHOT 01

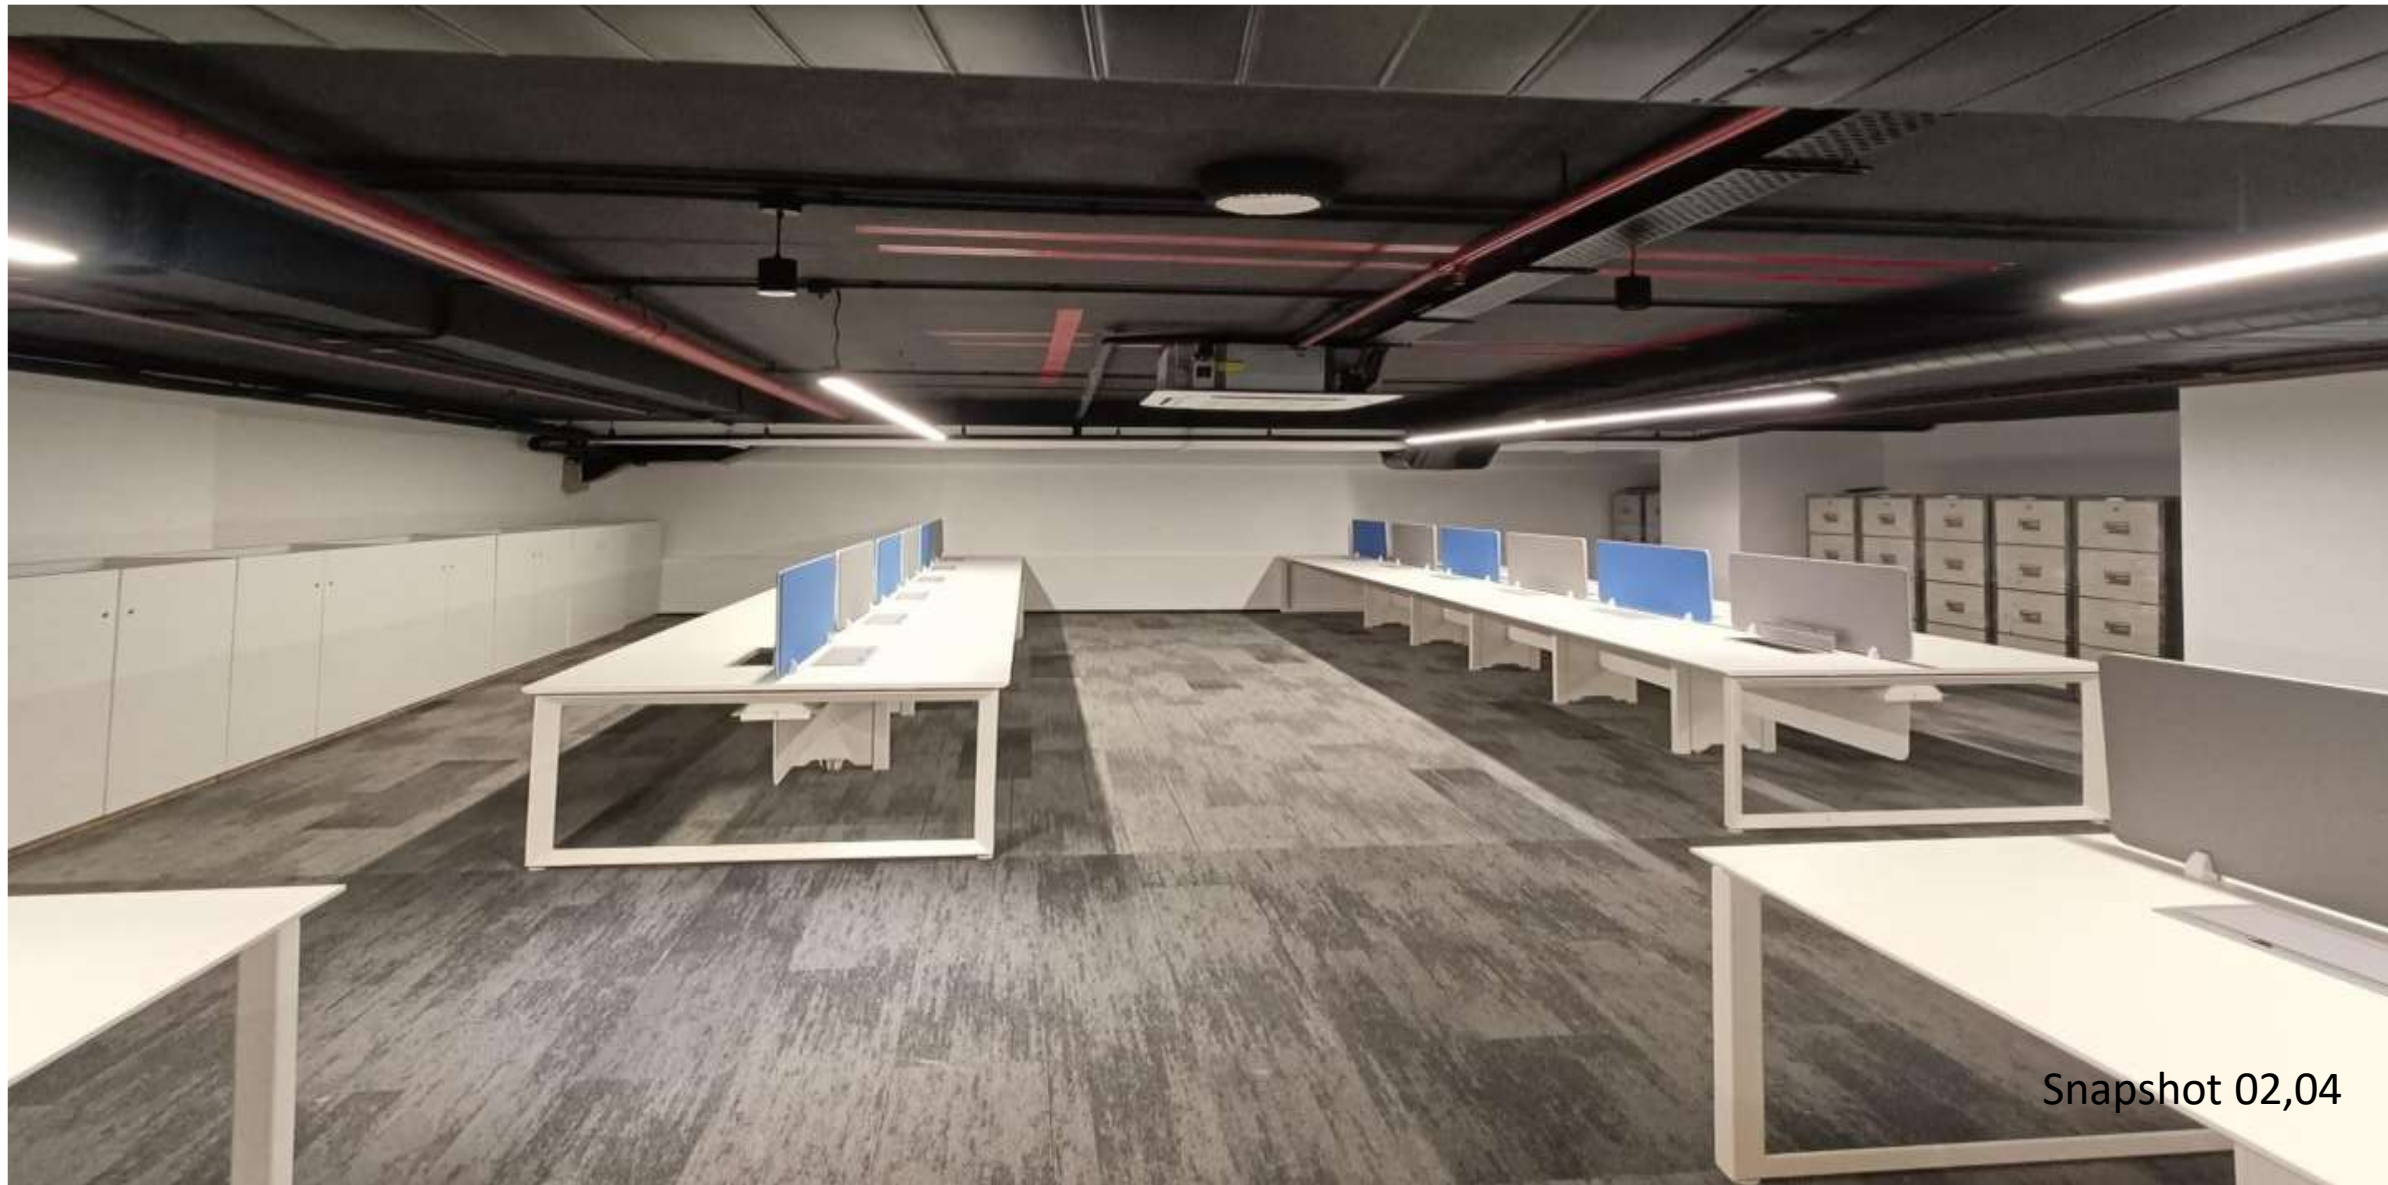

Snapshot 02,04





Snapshot 02,04



INSTALLEDIMAGES





Snapshot 02,04











SNAPSHOT 11



Snapshot 4,12

INSTALLEDIMAGES




Snapshot 10,12

SNAPSHOT

SPECIFIC ATIONSH EET

Technical Specifications

Make	
Style Name Construction	MOOIFLOR
YARN Gauge Stitches Pile	SNAPSHOT Multi-
Weight Pile Height Backing	Level Loop
Tile Size Area of Use	Universal Nylon
Installation Method	1/12" 11Per Inch
	18 OZ/yd2 2.5
	+0.4mm) Eco
	Backing
	25cm*100cm
	Heavy Commercial



Performance Specifications

	TestCode	Standard	Test Results
Flammability Tests		Standard	
Radiant Panel	ASTM E 648-	Class I Less than 450	GB8624-2012-B Pass
Smoke Density	10		GB/T 8627-1999
Anti-Static	ASTM E 662		
Static Propensity	AATCC 134	≤ 3.5 KV	GB/T 18044-2008
Delamination	ASTM	23.0 lbc/in	
Dimensional Stability	D3936	≤ 0.2%	Pass
Tuft Bind	A A CHN	8.0 lbs	≤ 8.0 lbs
Anti-Static	ASTM		
Static Propensity	AATCC 134		≤ 3.5 KV Pass
Color Fastness	D1335		
Light Rubbing/Color Checking	AATCC 116	≤4-5	4-5 Pass
Wear Tests	E	5	4-5 Pass
Castor Chair	AATCC 165	≤4-	
	BS AN 985	52.4	r=2.8 Pass
	AATCC 165	≤3-4	3 Pass
Generic Tests			
Green Carpet (VOC)	CRI GreenLabel	GLP	Accredited
Acoustic-Nylon		6331#/6330#	
	BS ISO 354 Absorption Coefficient-NRC	0.15	



NOTE: All Product Specifications are averages derived from product sample testing and are subject to normal manufacturing tolerances and testing tolerances. Product Specifications may be changed without notice as long as product performance is not materially affected.

SUNGLOW


Single tile images



01



02

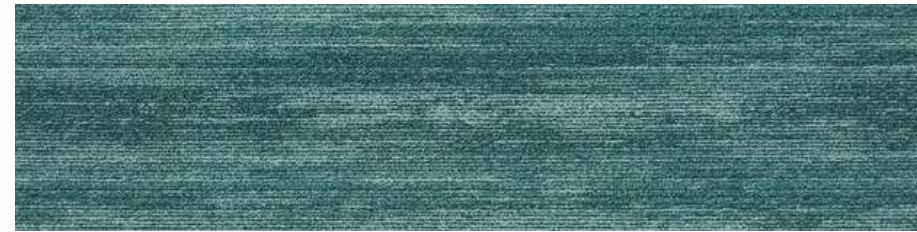

03



04



05



06




07



08



09

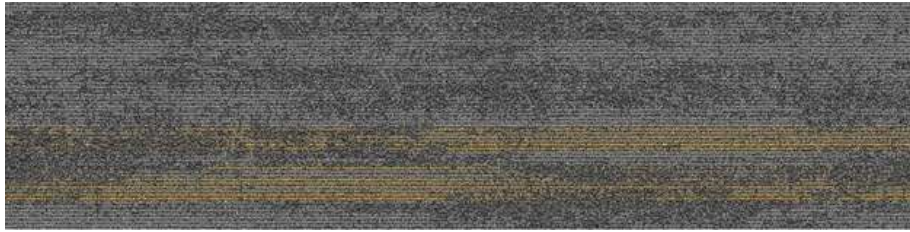

10




11



13




15

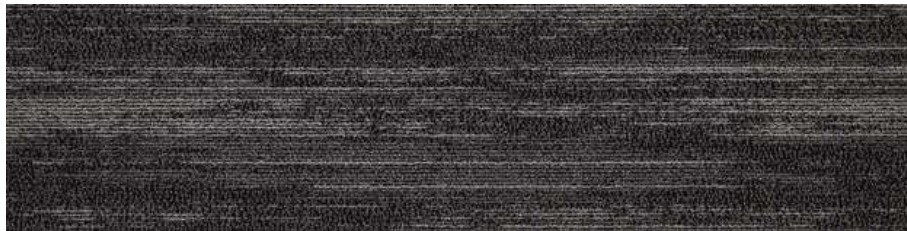

14



16

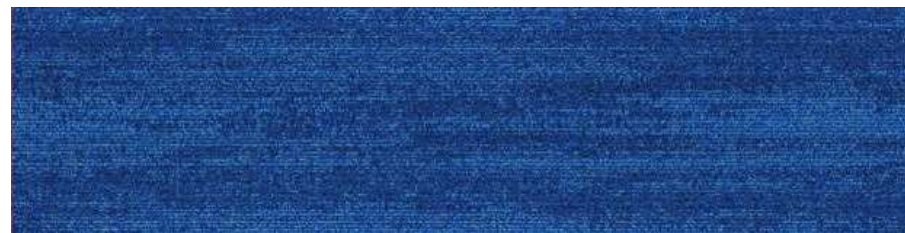

17





paradise





paradise







paradise






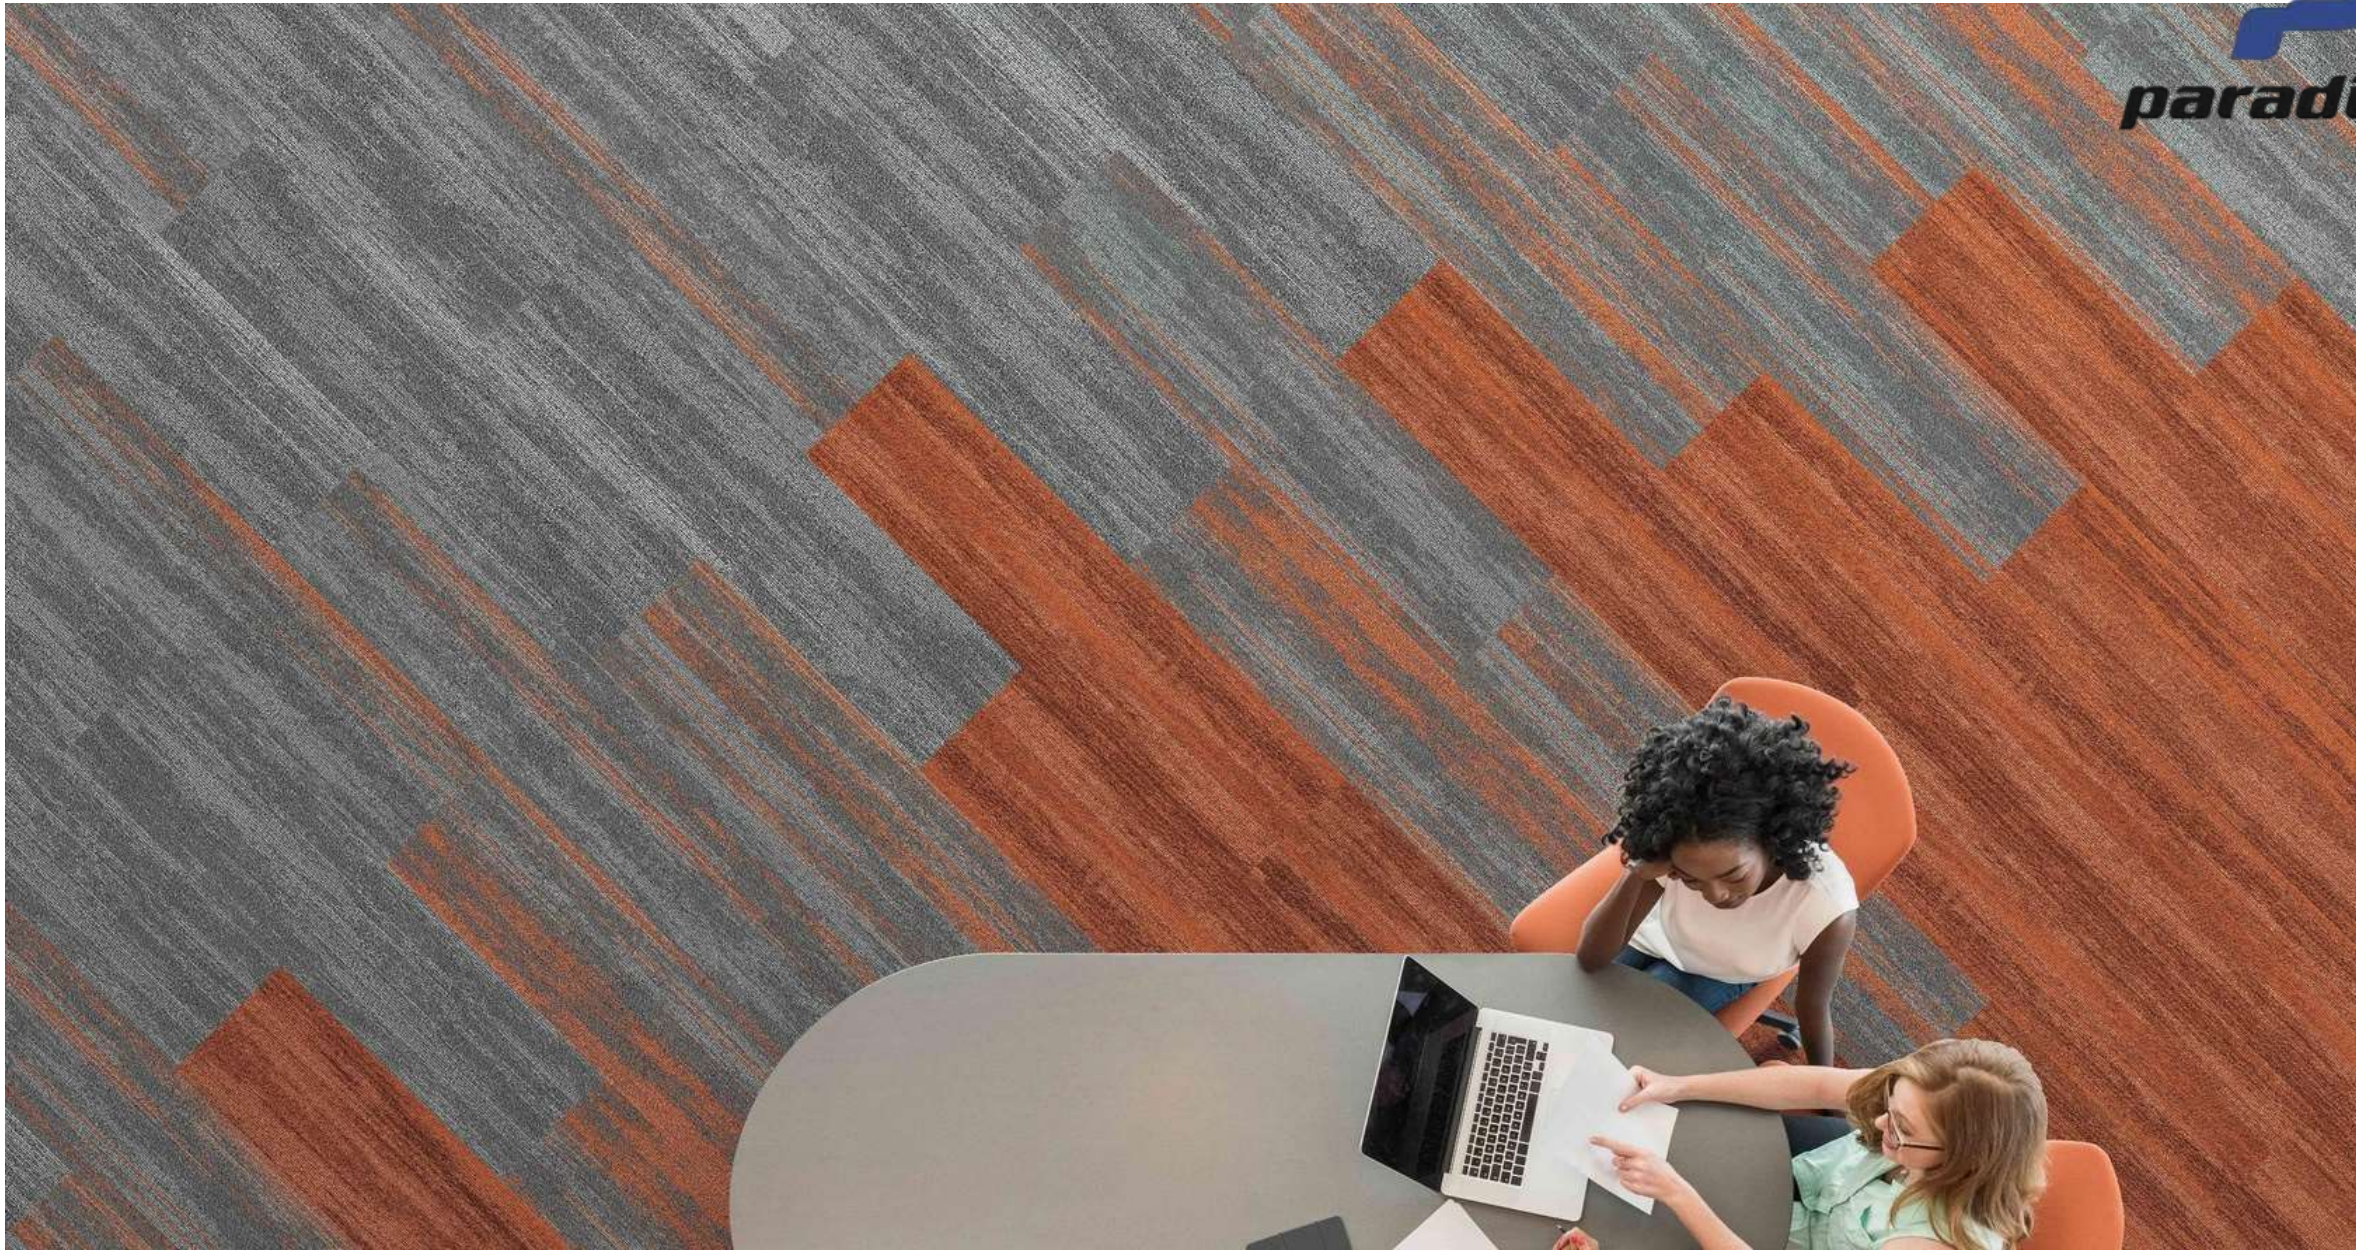

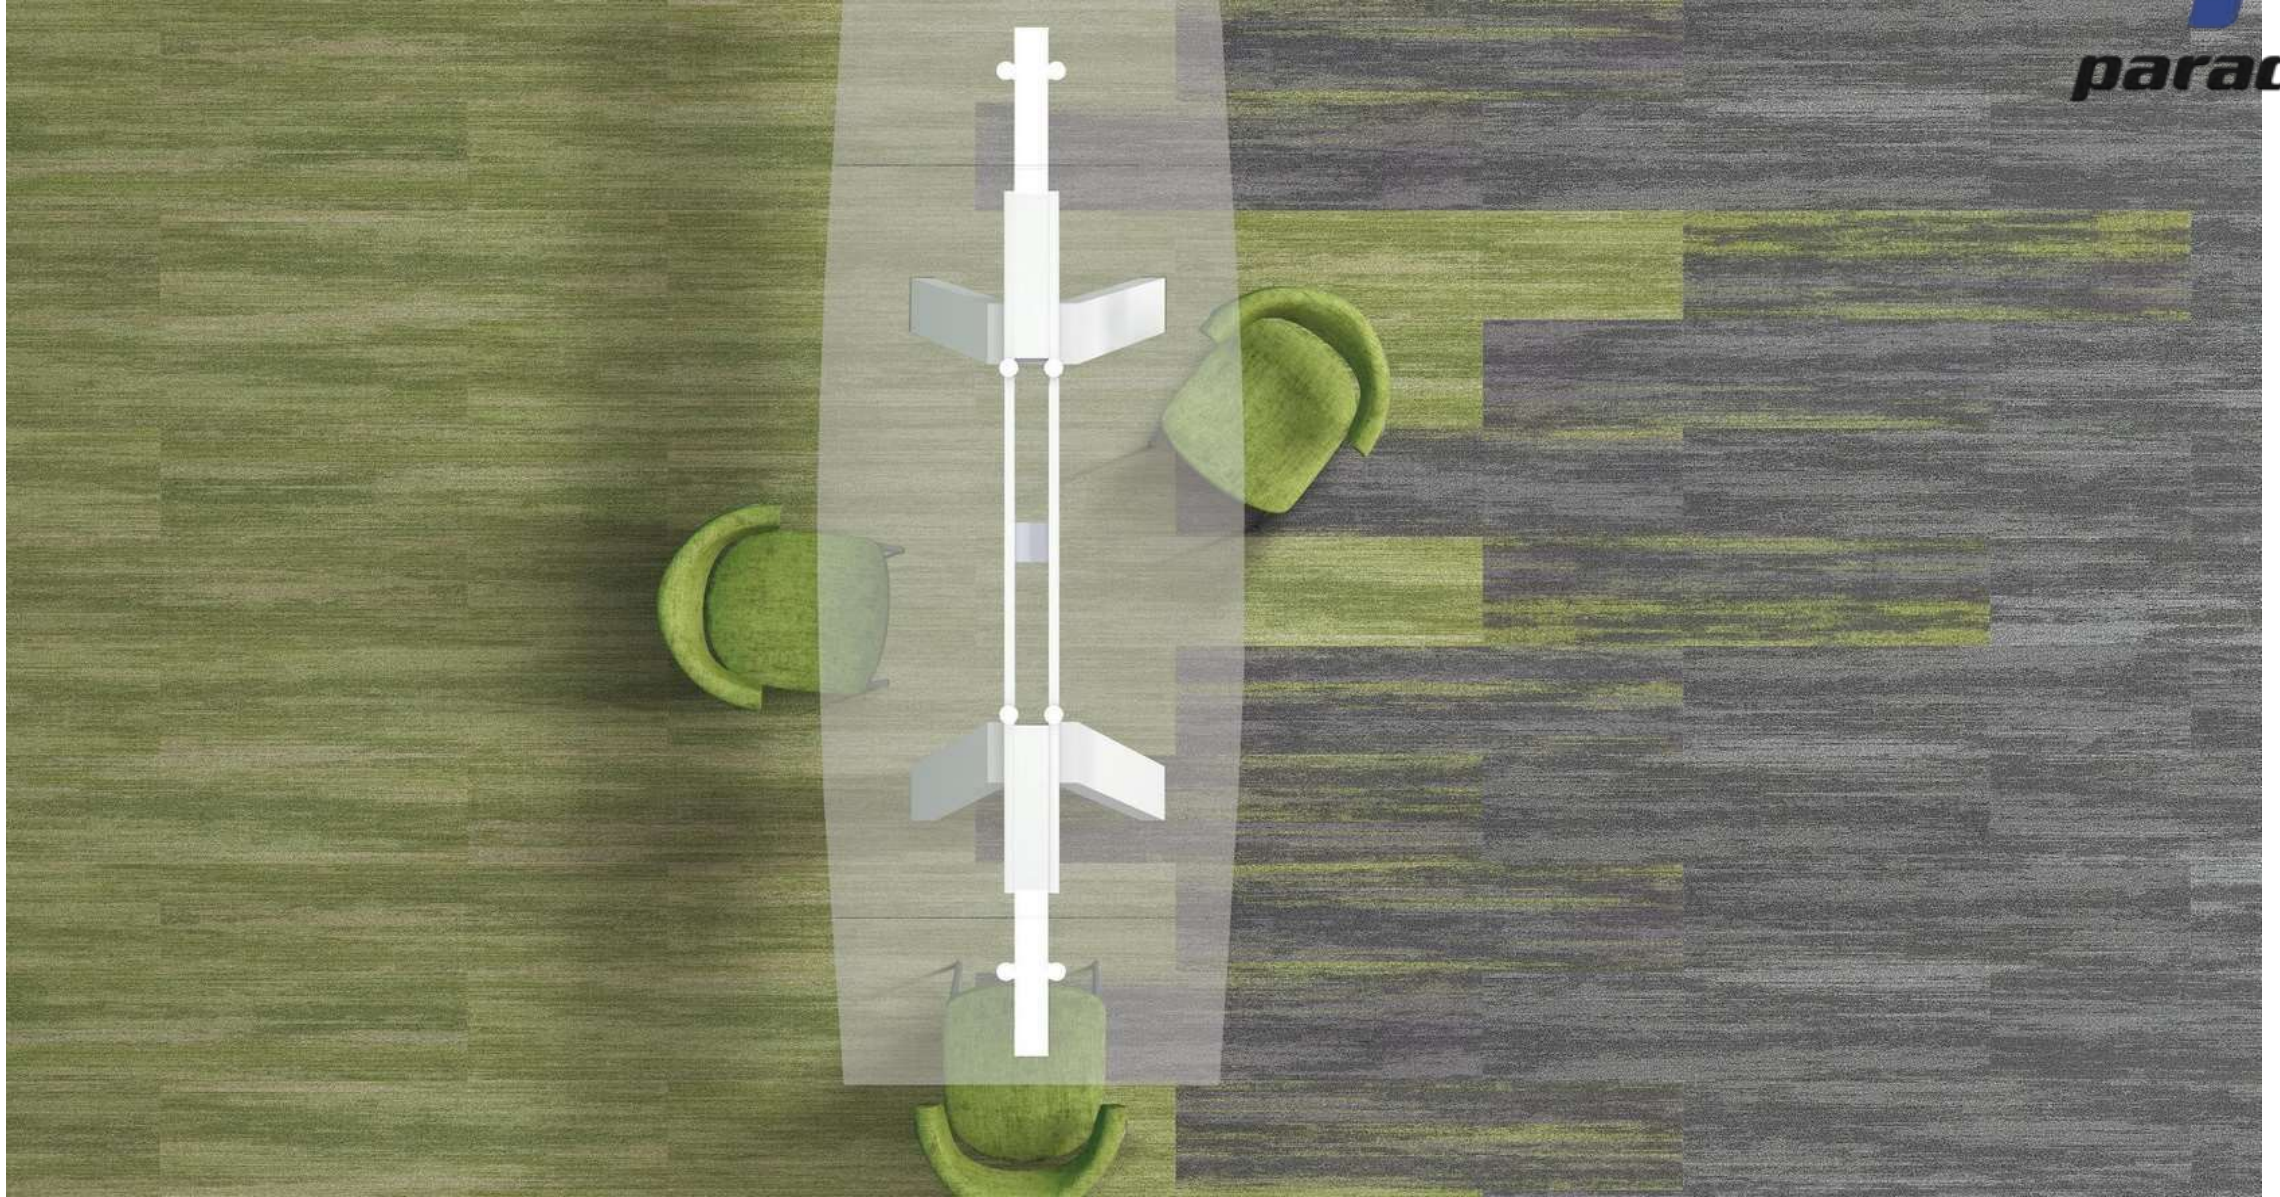




paradise

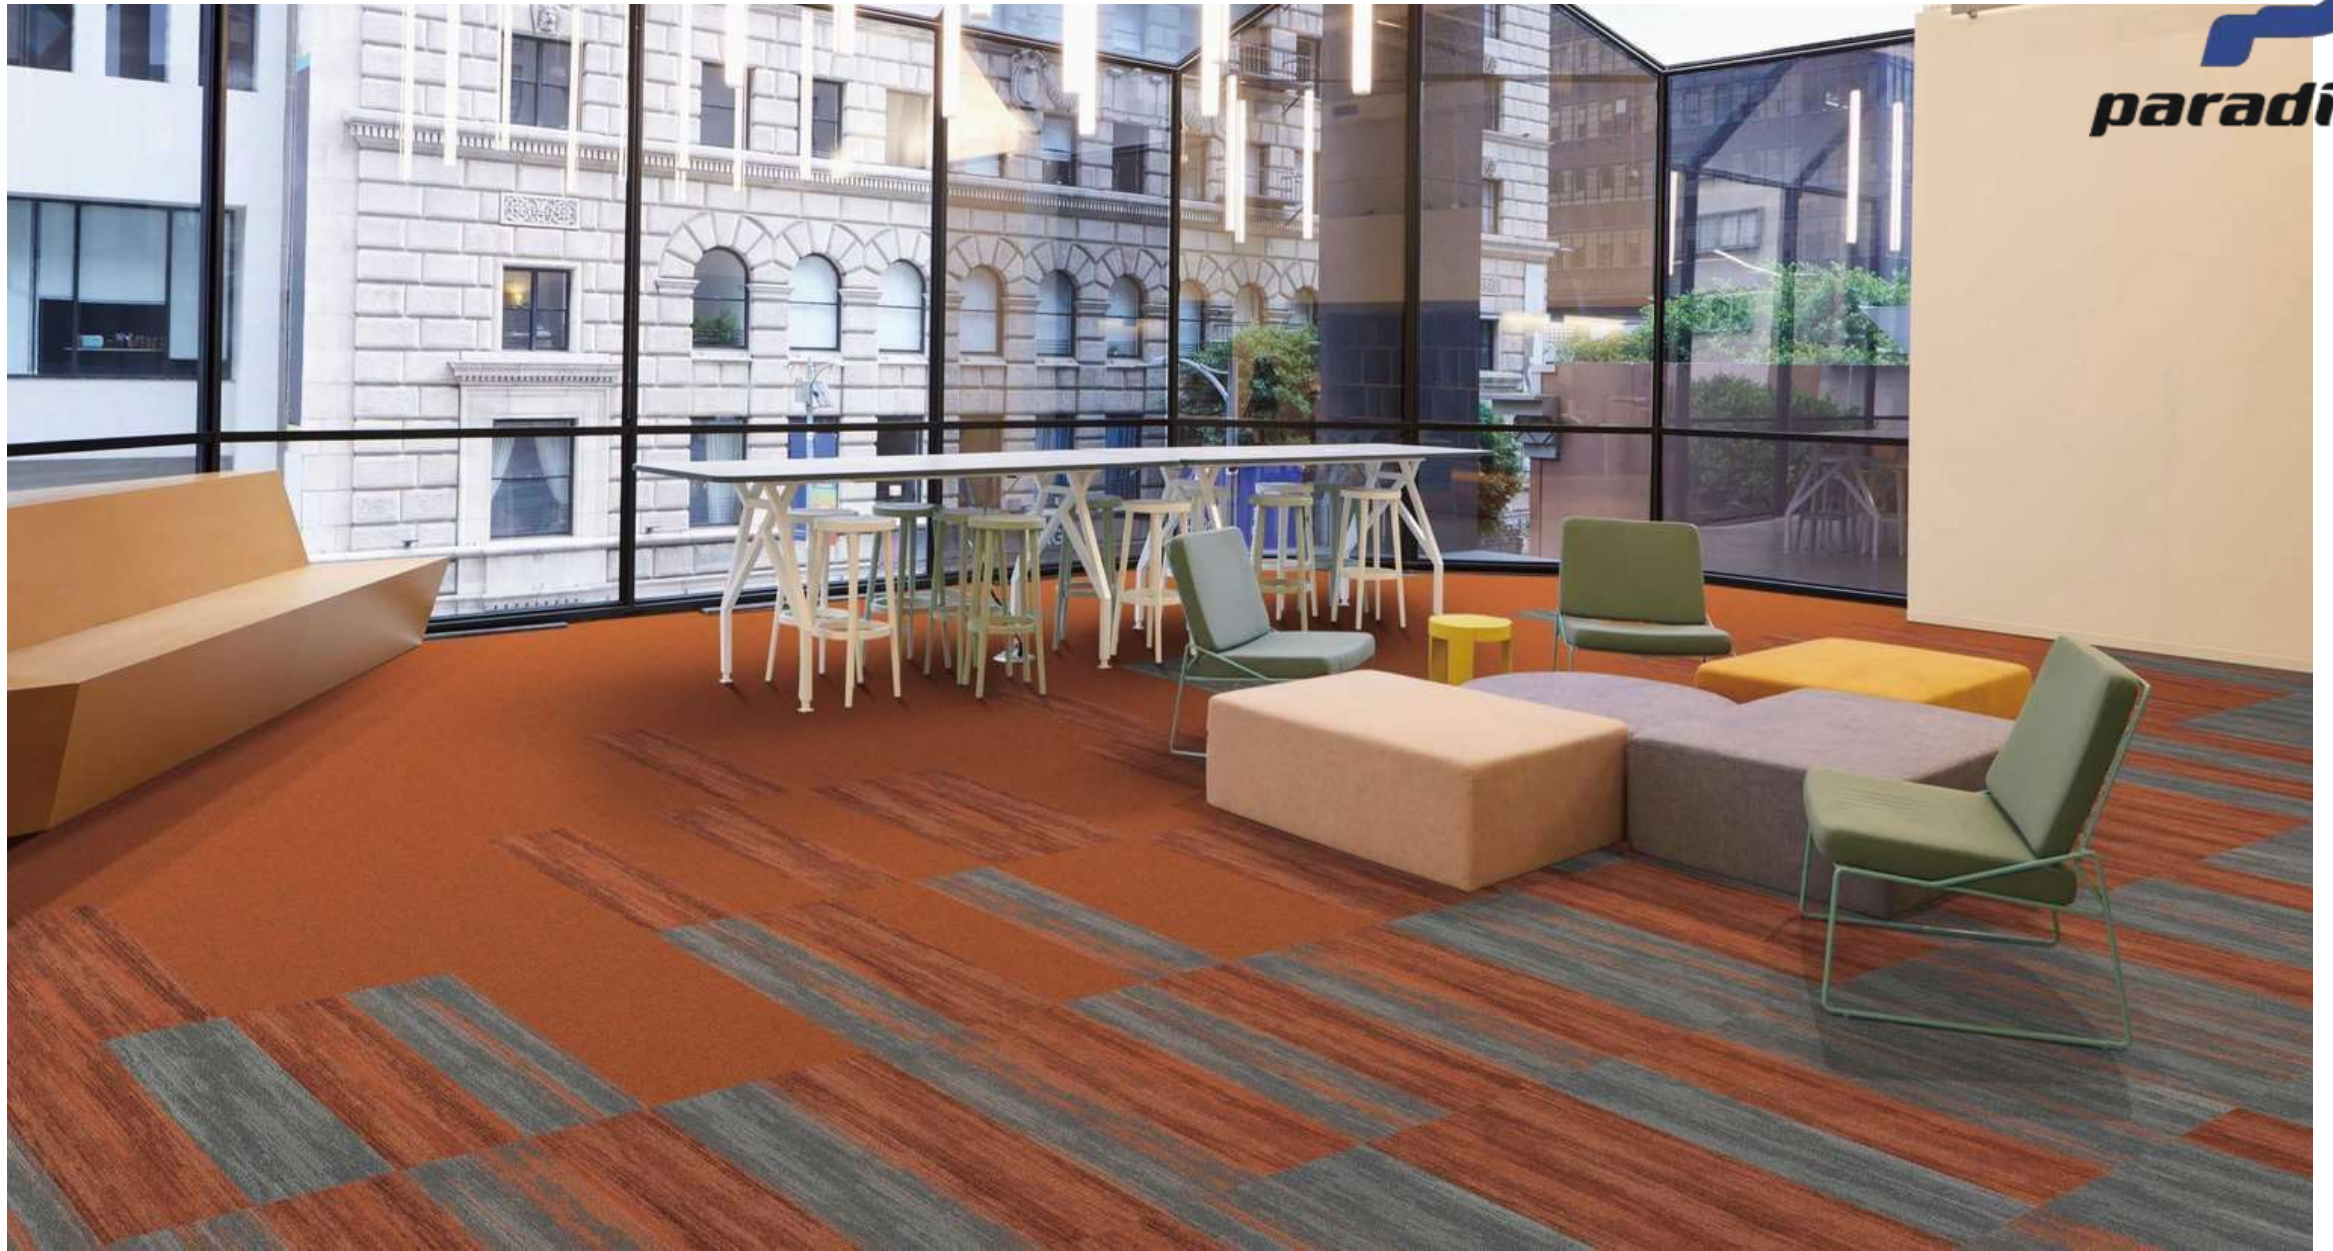



paradise



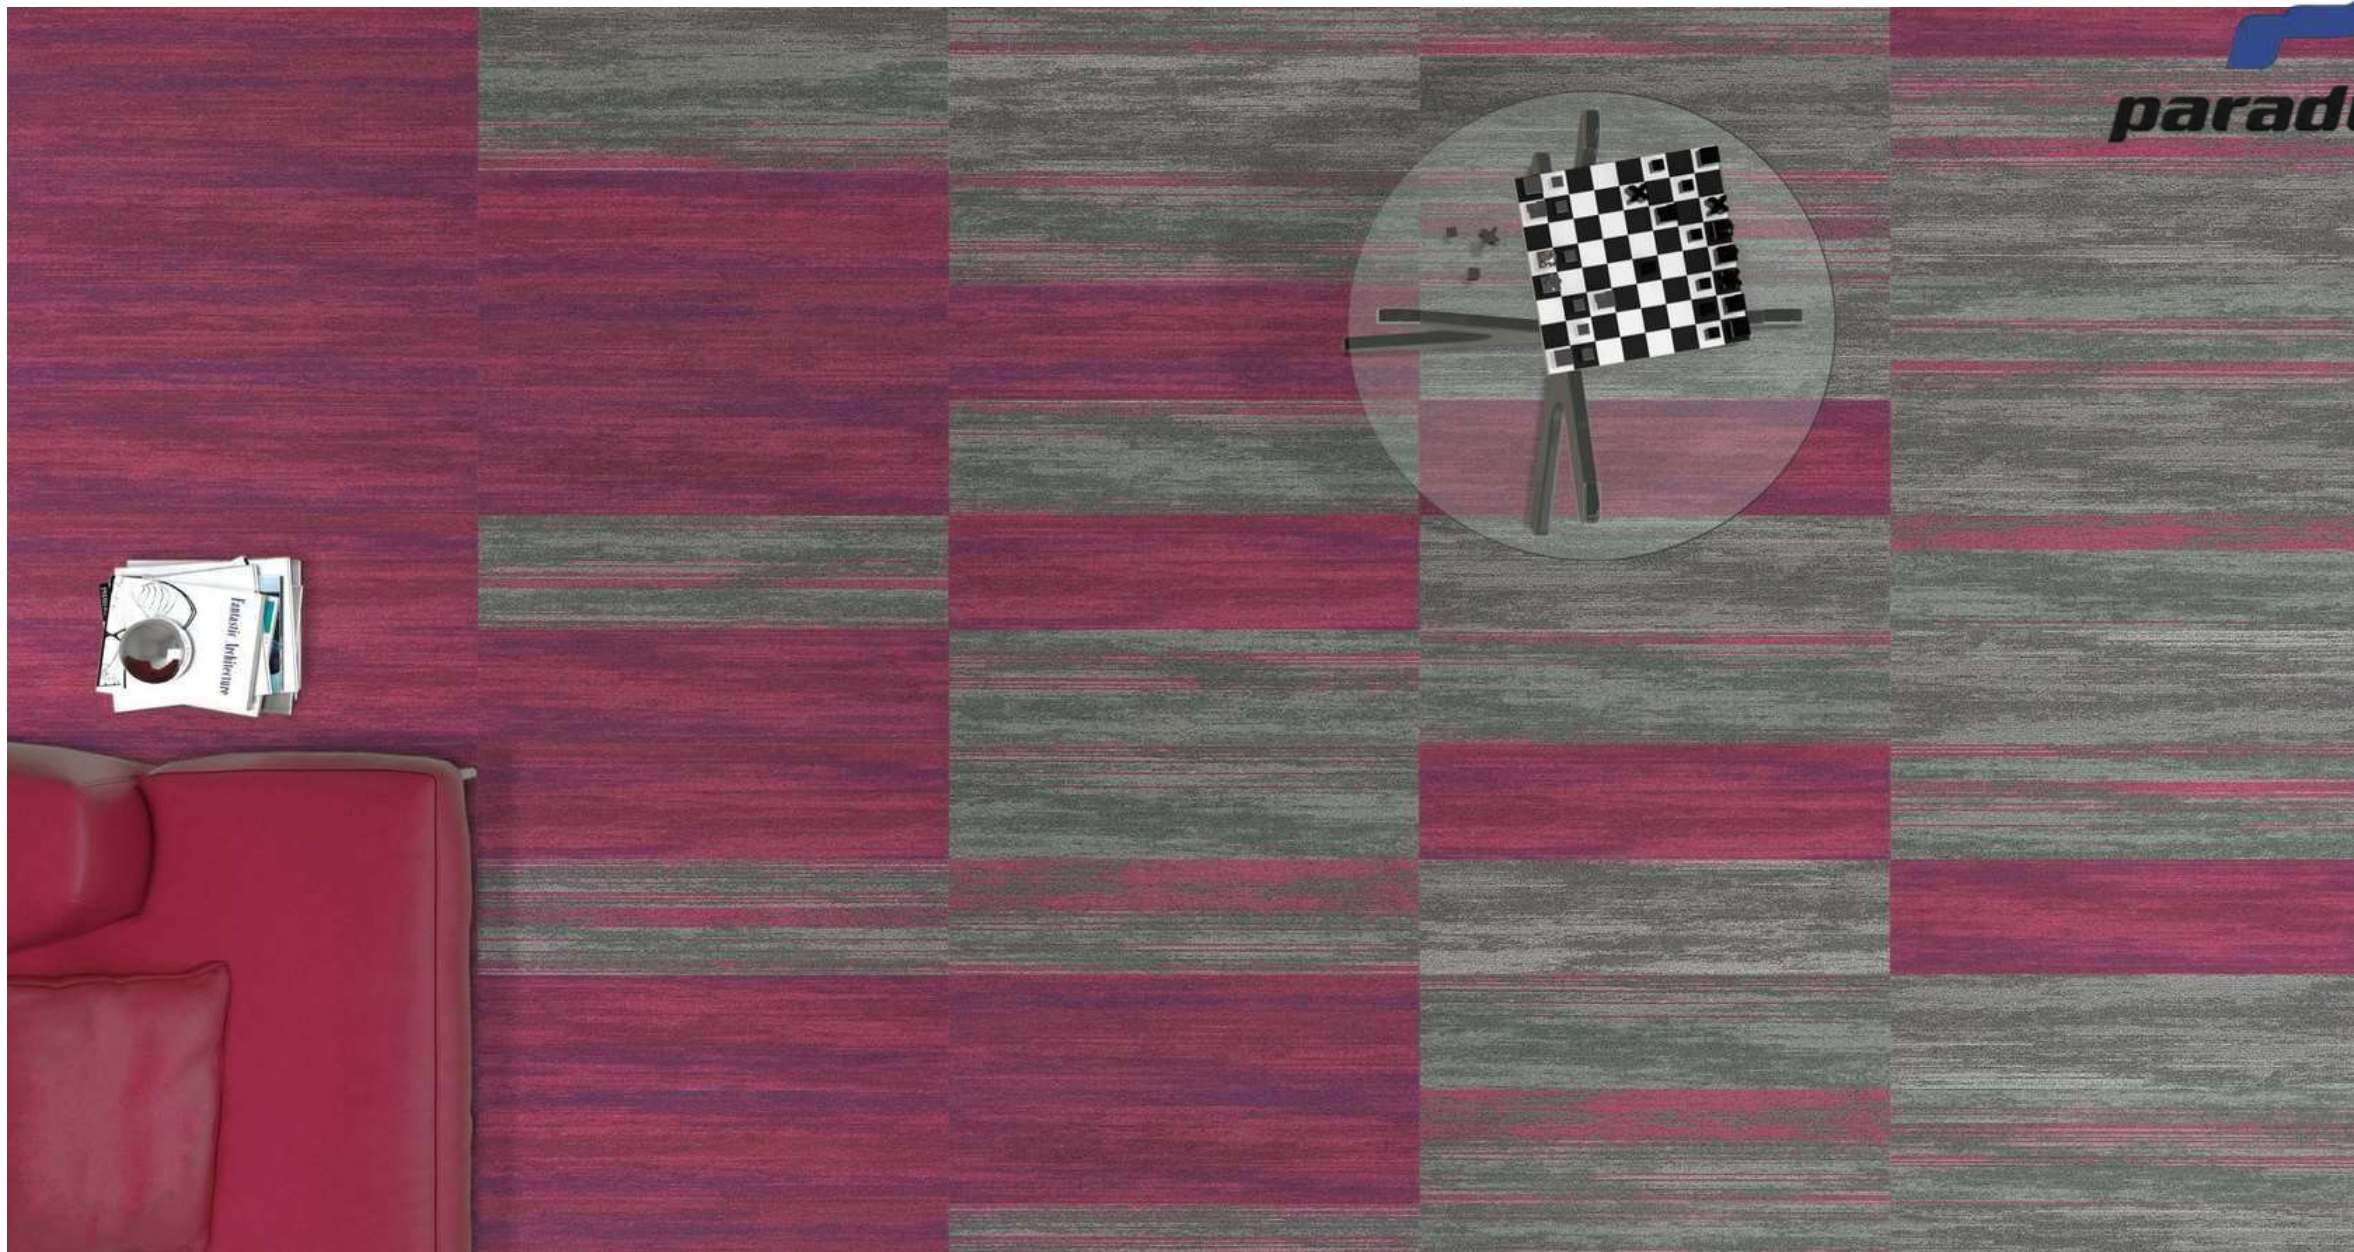






paradise



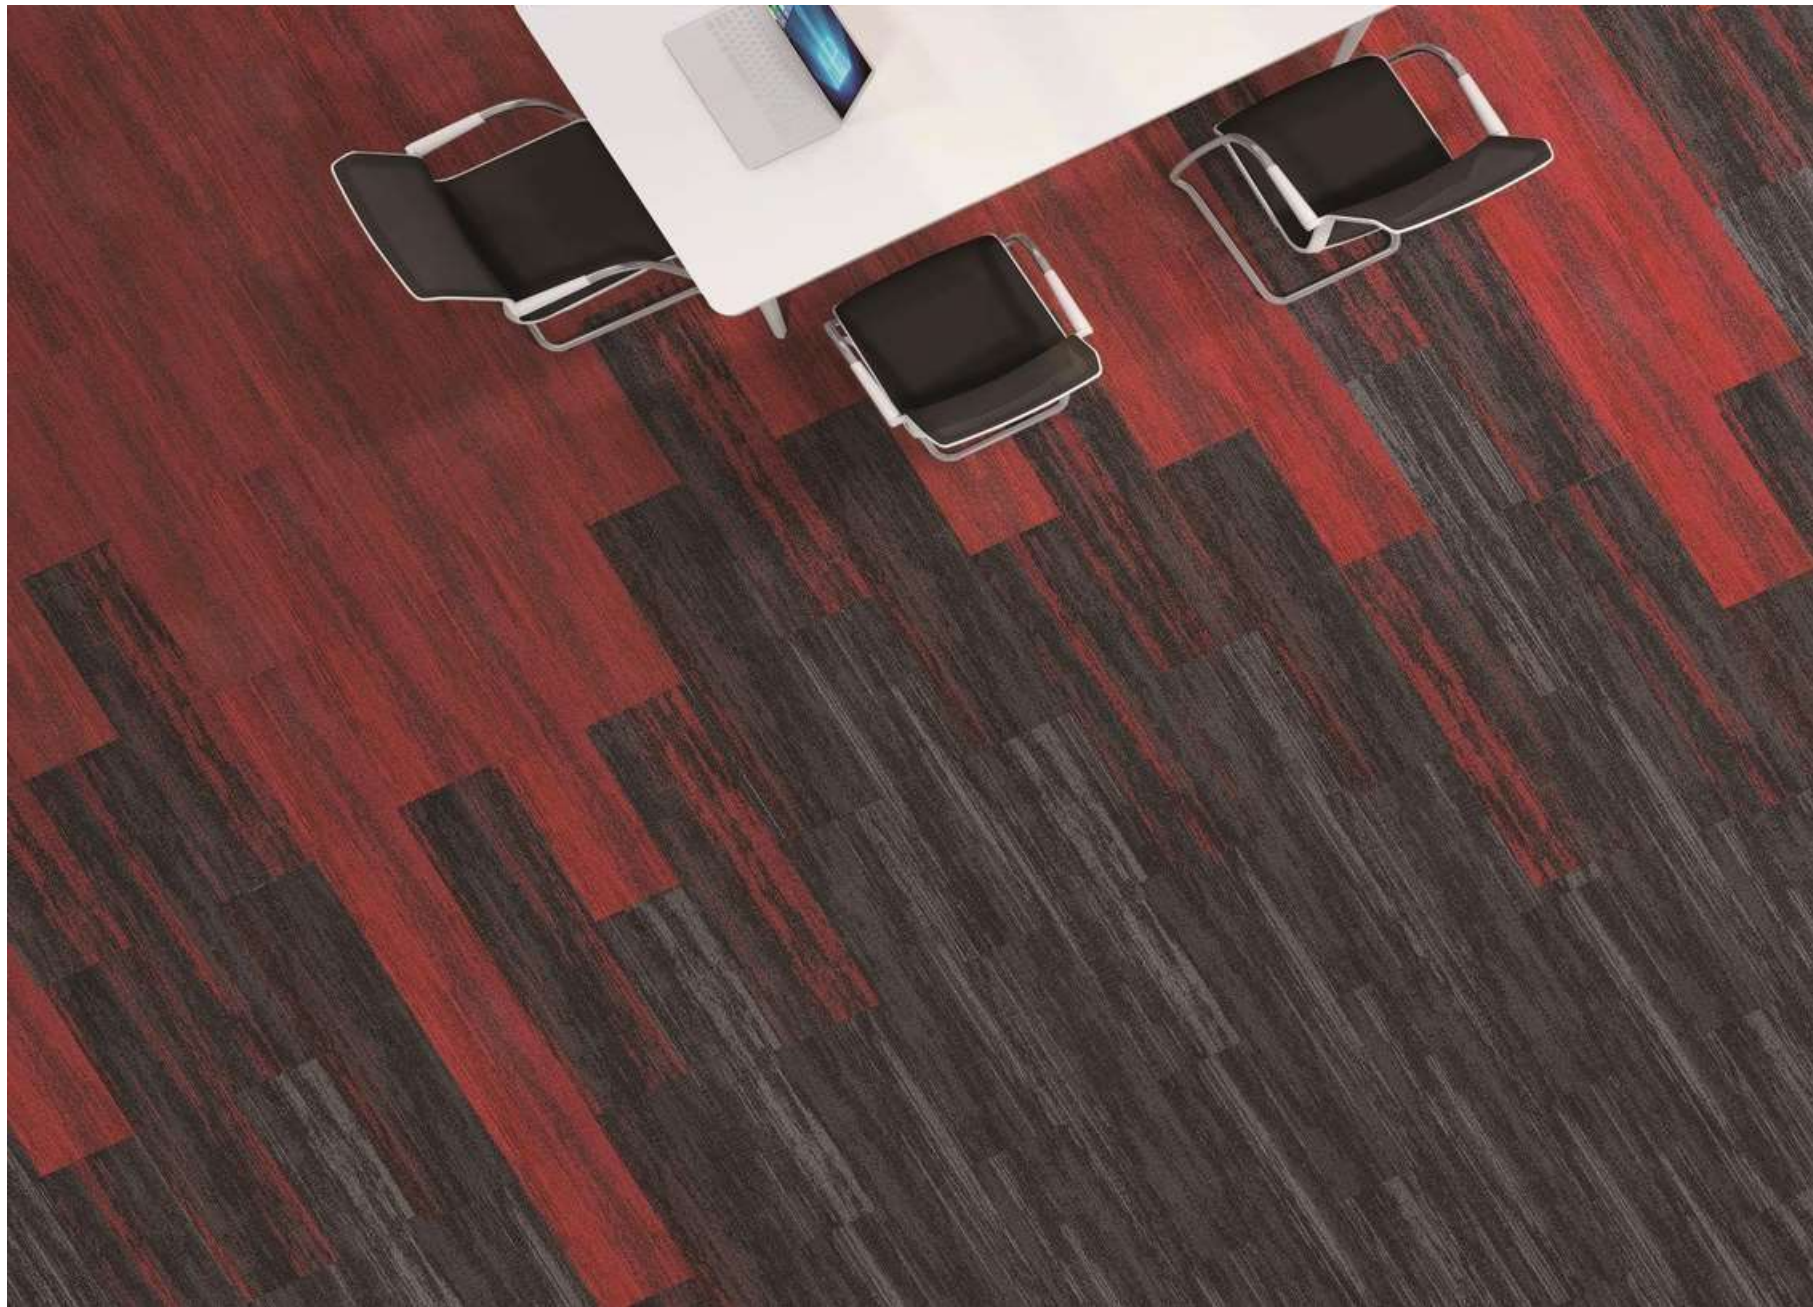



paradise





Paradise Floor & windows

Kamdhenu 23 West, Tower Next To White House 9th Floor,

OfficeNo.908,PlotNo.A10/2,Thane-BelapurRoad

Koparkhairane, Navi Mumbai- 400709

✉ EmailID: paradiseoffice15@gmail.com

☎ MobileNo-8879743521/9136133522

Thank you